

Snap-on®

HD35 SERIES

**HEAVY DUTY Automatic Transmission
& Power Steering Fluid Exchangers**



Operations Manual
EETF303A & EETF304A

941209





TABLE OF CONTENTS

INTRODUCTION to the EETF303A & EETF304A.....	2
I. SAFETY INFORMATION	3
- Section 1.01: Important Safety Notice.....	3
- Section 1.02: Important Safety Instructions.....	5
II. SYSTEM FEATURES & SPECIFICATIONS	9
- Section 2.01: Features.....	9
- Section 2.02: Dimensions & Technical Specifications.....	10
- Section 2.03: Machine Overview.....	11
- Section 2.04: Control Panel Overview.....	12
- Section 2.05: Special Functions.....	15
III. OPERATING PROCEDURES	16
- Section 3.01: Suggested Additional Tools.....	16
- Section 3.02: Transmission Fluid Exchange.....	18
- Section 3.03: Power Steering Fluid Exchange.....	19
IV. TROUBLESHOOTING & ADDITIONAL HELP	20
- Section 4.01: Common Problems/Solutions.....	21
- Section 4.02: Customer Service Contact Information.....	21
V. APPENDIX A – HOSES & ADAPTERS	22
- Section 5.01: Adapter Hoses.....	22
- Section 5.02: Adapters.....	25
VI. APPENDIX B – MAINTENANCE	26
- Section 6.01: Maintenance Procedures.....	26
VII. APPENDIX C – REPLACEMENT PARTS	27
- Section 7.01: Replacement Part List.....	27
- Section 7.02: Replacement Part Illustrations.....	29
- Section 7.03: Ordering Information.....	30
LIMITED WARRANTY	31



INTRODUCTION

to the EETF303A & EETF304A

Congratulations on the purchase of your Snap-on HD35 fluid exchanging machine!

Simply put, this machine is the cleanest, safest, easiest, fastest, most thorough, and most cost-efficient method of fluid exchange ever devised. Suddenly, regular automatic transmission and power steering maintenance become a more realistic proposition. Transmission and power steering fluid exchanging are cleaner and neater than ever!

Transmission Fluid Exchange:

To attain the highest level of protection for internal transmission components and increase the transmission's life span to the maximum, it is recommended that the transmission's lubrication system is serviced every 15,000 miles (or according to the vehicle owner's manual). The Snap-on HD35 SERIES exchanges virtually all of the used transmission fluid to new, without even requiring the transmission pan to be dropped. There is no spillage, and no mess.

Power Steering Fluid Exchange (EETF304A Only):

Service neglect leads to power steering system complaints including poor handling, hard or sluggish steering, and objectionable noise. Historically, power steering system fluid service has been neglected, often due to the lack of a convenient method for providing such flush or fluid exchange services. Previous methods for flushing the power steering system or replacing the power steering fluid were time consuming and often inefficient or incomplete. Now, it's easier than ever to replace up to 95% of the old power steering fluid in less than 8 minutes, to ensure your power steering system has a long, trouble-free life.

- **The HD35 can be used practically anywhere – and with almost any vehicle.**
- **It is compact, mobile, and self-contained.**
- **It operates off the 12-volt battery of the vehicle being serviced.**
- **It does not require a pit, lift, or ramp.**
- **The HD35 hooks up directly to one of the vehicle's transmission cooler lines for a transmission fluid exchange.**
- **The ATF fluid exchange, from setup to finish, typically takes 15 minutes or less!**

No wonder an ATF exchange is the most requested method of preventative automatic transmission maintenance today. Now there's the option of a power steering fluid exchange as well... Both in one machine!

Please take time to read through this manual to familiarize yourself with the HD35 before performing your first ATF or PSX exchange.

I. SAFETY INFORMATION

1.01 IMPORTANT SAFETY NOTICE

For your safety, read this manual thoroughly before operating your HD35 unit. Your HD35 unit is intended for use by properly trained, skilled professional automotive technicians. The safety messages presented below and throughout this user's manual are reminders to the operator to exercise care when using this unit. Before using your HD35 unit, always refer to and follow the safety messages and applicable service procedures provided by the manufacturer of the vehicle being serviced.

• Read All Safety Instructions

Read, understand and follow all safety messages and instructions in this manual. Safety messages in this section of the manual contain a signal word with a three-part message and, in some instances, an icon.

• Signal Words

The signal word indicates the level of the hazard in a situation:

DANGER

Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury to the operator or to bystanders.

WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury to the operator or to bystanders.

CAUTION

Indicates a potentially hazardous situation which, if not avoided, may result in moderate or minor injury to the operator or to bystanders.

IMPORTANT

Indicates a situation which, if not avoided, may result in damage to the HD35 or the vehicle being serviced.

• Safety Messages

Safety messages in this section contain three different type styles:

- Normal type states the hazard.
- **Bold type** states how to avoid the hazard.
- *Italic type* states the possible consequences of not avoiding the hazard.

• **Safety Symbols**

A safety symbol, when present, gives a graphical description of the potential hazard, and how to avoid the hazard:



Risk of Fire



Read Instructions Before Use



Risk of Explosion



Mandatory Eye Protection



Risk of Entanglement



Mandatory Protective Gloves



Dangerous Fumes



Mandatory Protective Clothing



Do Not Pull or Move

1.02 IMPORTANT SAFETY INSTRUCTIONS

DANGER



Engine exhaust contains toxic gases.

- Vent vehicle's exhaust away from work area.
- Do not breathe exhaust.

Exhaust gases will cause injury or death.

WARNING



Improper use and operation.

- Read, understand and follow all safety messages and operational procedures in this manual before operating the Snap-on HD35.
- This equipment should be operated only by qualified personnel.
- Use this equipment only as described in this manual.

Improper use and operation of this product can result in injury.

WARNING



Engine systems can malfunction expelling fuel, oil vapors, hot steam, hot toxic exhaust gases and other debris.

- Wear safety goggles and protective clothing, user and bystander.

Engine systems that fail can cause serious injury.

WARNING



Risk of expelling pressurized fluids.

- Wear safety goggles and protective clothing, user and bystander.
- Verify that engine and machine are off before connecting or disconnecting cooler lines and adapter hoses.
- Always unplug the machine from its power source when not in use.
- Keep the service hoses away from hot or moving engine parts. Hoses can split or burst causing fluid to be expelled.
- Tighten all connections properly. Insufficient or excessive torque can result in fluid leakage.
- Avoid contact with automatic transmission or power steering fluid.
- Treatment methods are as follows:
 - Eyes: Flush eyes with plenty of water.
 - Skin: Wash with soap and water.

Inhalation: Move to uncontaminated area.

Ingestion: If large amount, get medical attention.

If any irritation persists, get medical attention.

- **Dispose of used fluid according to environmental laws and regulations.**

Although automatic transmission and power steering fluid pose no significant health hazards, some individuals may experience adverse reactions upon contact. Pressurized fluid can cause serious injury.

WARNING

Risk of unexpected vehicle movement.

- **Block drive wheels before starting vehicle's engine to begin an exchange.**
- **Unless instructed otherwise, set parking brake and put gear selector in park.**
- **Do not leave a running vehicle unattended.**

A moving vehicle can cause injury.

WARNING



Engine has moving parts. Risk of entanglement.

- **Do not place tools on fenders or other places in engine compartment.**
- **Keep yourself, clothing, battery cables and service hoses clear of moving parts such as fan blades, belts and pulleys.**

Contact with moving parts can cause injury.

WARNING



Risk of fire or explosion.

- **Do not operate the HD35 in the vicinity of open containers of flammable liquids such as gasoline.**
- **Keep hoses and jumper cables away from heat sources and sharp edges.**
- **Do not operate equipment with damaged cords or hoses until they have been examined by a qualified serviceman.**

Fire or explosion can cause injury.

WARNING



Risk of fire or explosion. Gases produced by a battery are highly explosive.

- **Wear safety goggles and protective clothing, user and bystander.**
- **This machine is equipped to operate on 12-volt DC power only. A power source greater than this can result in serious injury to the user as well as damage to the machine.**
- **Do not smoke, place metal tools on battery or allow a spark or flame in vicinity of battery.**
- **Clean battery terminals before hooking the machine's battery clips to them. During cleaning, keep airborne corrosion from eyes, nose and mouth.**

- Be sure both battery cables are tightly connected to the battery terminals as instructed before proceeding with a fluid exchange.
- Never remove battery cables from the battery terminals while the machine is operating. Only use the “EMERGENCY STOP” button located on the control panel to stop an exchange.

Battery explosion can cause injury.

WARNING



Battery acid is a highly corrosive sulfuric acid.

- **Wear safety goggles and protective gloves, user and bystander.**
- **Have plenty of fresh water and soap nearby. If battery acid contacts skin, clothing, or eyes, flush exposed area with soap and water for 10 minutes.**
- **While cleaning battery’s terminals, keep airborne corrosion from eyes, nose and mouth.**
- **Do not touch eyes while working near battery.**

Battery acid can burn eyes and skin.

WARNING



Risk of burns.

- **Wear gloves when working near hot engine components.**
- **Do not touch hot exhaust systems, manifolds, engines, radiators, etc.**
- **The automatic transmission fluid coming from the vehicle along with some of the machine’s components that the fluid comes into direct contact with (i.e. external: hoses and quick-disconnect fittings; internal: hoses and all fittings) may reach temperatures uncomfortable to the touch. Exercise caution in avoiding contact with these items.**

Hot components can cause injury or discomfort.

CAUTION

Ratchet mechanisms and tools may slip or break if dirty. Mismatched or partially worn parts can cause ratchet or any tool to slip or break.

- **Frequently inspect and clean any tools used, and lubricate all non-sealed ratchet mechanisms with light oil.**
- **Do not replace worn parts individually. If adapter hose fittings become worn, see “Appendix C – Replacement Parts” to order new hoses.**
- **The use of any other accessories not specified in this manual may create a hazard.**

Tools that slip or break can cause injury.

CAUTION



Risk of injury.

- **This equipment should be operated by qualified personnel only.**
- **Use this equipment only as described in this manual.**

- Always unplug the machine from its power source when not in use.
- Loop the power cord loosely in its proper location when machine is not in use.
- Do not operate equipment with a damaged battery cables or hoses, or if the equipment has been dropped or damaged, until it has been examined by a qualified service representative.
- Care should be taken to arrange the battery cables and service hoses so that they will not be tripped over or pulled.
- Never pull on the power cables or service hoses to transport the HD35. Damage may occur to these components, or machine may tip over.
- Keep area of operation clear of unnecessary tools and equipment. Utilize recessed tool storage areas on the top of the machine.
- Never leave the machine running unattended.
- The HD35 is not designed for any other purpose than the exchanging of automatic transmission and power steering fluid.

Operation of your HD35 unit by anyone other than qualified personnel may result in injury.

IMPORTANT

Risk of equipment damage.

- Flushing high mileage cars that have not been previously serviced can cause operating problems in the transmission.
- Connect battery cables to a 12-volt power source only (i.e. vehicle's battery).
- Servicing, transporting, or storing this machine in an attitude other than the normal operating position can result in fluid spillage and/or component damage.
- Use only the manufacturer's recommended attachments.
- The Snap-on HD35 is fully automatic. Refer to your control panel at all times.
- Never pull on the power cables or service hoses to transport the HD35. Damage may occur to these components, or machine may tip over.
- Periodically clean the machine by wiping down with a clean, soft, dry cloth.

Improper operation of equipment may result in damage to machine or components.

SAVE AND FOLLOW THESE INSTRUCTIONS!

II. SYSTEM FEATURES & SPECIFICATIONS

2.01 FEATURES

Mechanical Features

- Accurate sensor technology allows optimum fluid level to be maintained in vehicle's transmission.
- Two in-line 10-micron absolute fluid filters capture microscopic particles and contaminants.
- Numbered quick-disconnect hoses with adapters save time in identifying the proper hoses for the application
- Easy to use adapters allow quick hookup to virtually any automobile make and model, saving time and money.
- Diverter valve reverses fluid flow without having to switch hoses.
- Clear service hoses give visual confirmation of new and used fluid movements.
- Ergonomically correct working height means greater productivity, less stress and strain.
- Durable roto-cast polyethylene body and tanks prevent vehicle damage. The unit is also lightweight and durable, for easier handling and longer life.
- Large 5-inch locking caster wheels make machine easy to maneuver.
- Easy-access service panel provides hassle-free operations for greater efficiency.

Electronic Features

- Self-contained battery cables hook up to the vehicle's 12-volt battery
- Automatic monitoring of fluid in new and used fluid tanks assures safe operation
- Accurate sensor technology (+/- 5%)
- Digital counter display with cumulative ATF options
- Indicating lamps are activated to show all machine operations and status functions
- Four capacity selections on machine to automatically pump specified quantity of ATF into transmission (capacities: 12, 16, 20 or 35 quarts)
- Fluid measurements can be changed from quarts to liters
- Drain used fluid tank (no need to tip machine upside-down)
- Drain new fluid tank
- Add new fluid to transmission in 2/10 quart increments (approx. 1/8" on the dipstick)
- Remove fluid from transmission in 2/10 quart increments (approx. 1/8" on the dipstick)
- Cycle valves feature allows you to electronically clean out valves
- Totalizer check (indicates lifetime use)
- Interactive options menu:
 - "Auto Prime" feature automatically primes the system
 - Indicate new fluid volume
 - Indicate used fluid capacity

Power Steering Fluid Exchange Unit (*EETF304A Only*)

- Remote pendant for ease of operation
- Compartment for new fluid bottle
- Drains directly to waste tank

2.02 DIMENSIONS & TECHNICAL SPECIFICATIONS

DIMENSIONS:

39 1/2" Tall
23" Wide
25 1/2" Deep

Service Hoses:
10' outside of machine

Wheels:
5" locking casters (front)
5" casters (back)

Fluid Tanks:
40-Quart New Fluid Tank
40-Quart Used Fluid Tank

Weight:
135 lbs.

TECHNICAL SPECIFICATIONS:

Power:
12-Volt DC from vehicle battery


Fluid Sensors:
+/- 5% accurate sensors

Filters:
10-micron absolute fluid filters


Operating Temperature:
60° to 150°F (15° to 65°C)

2.03 MACHINE OVERVIEW


(EETF304A Shown)

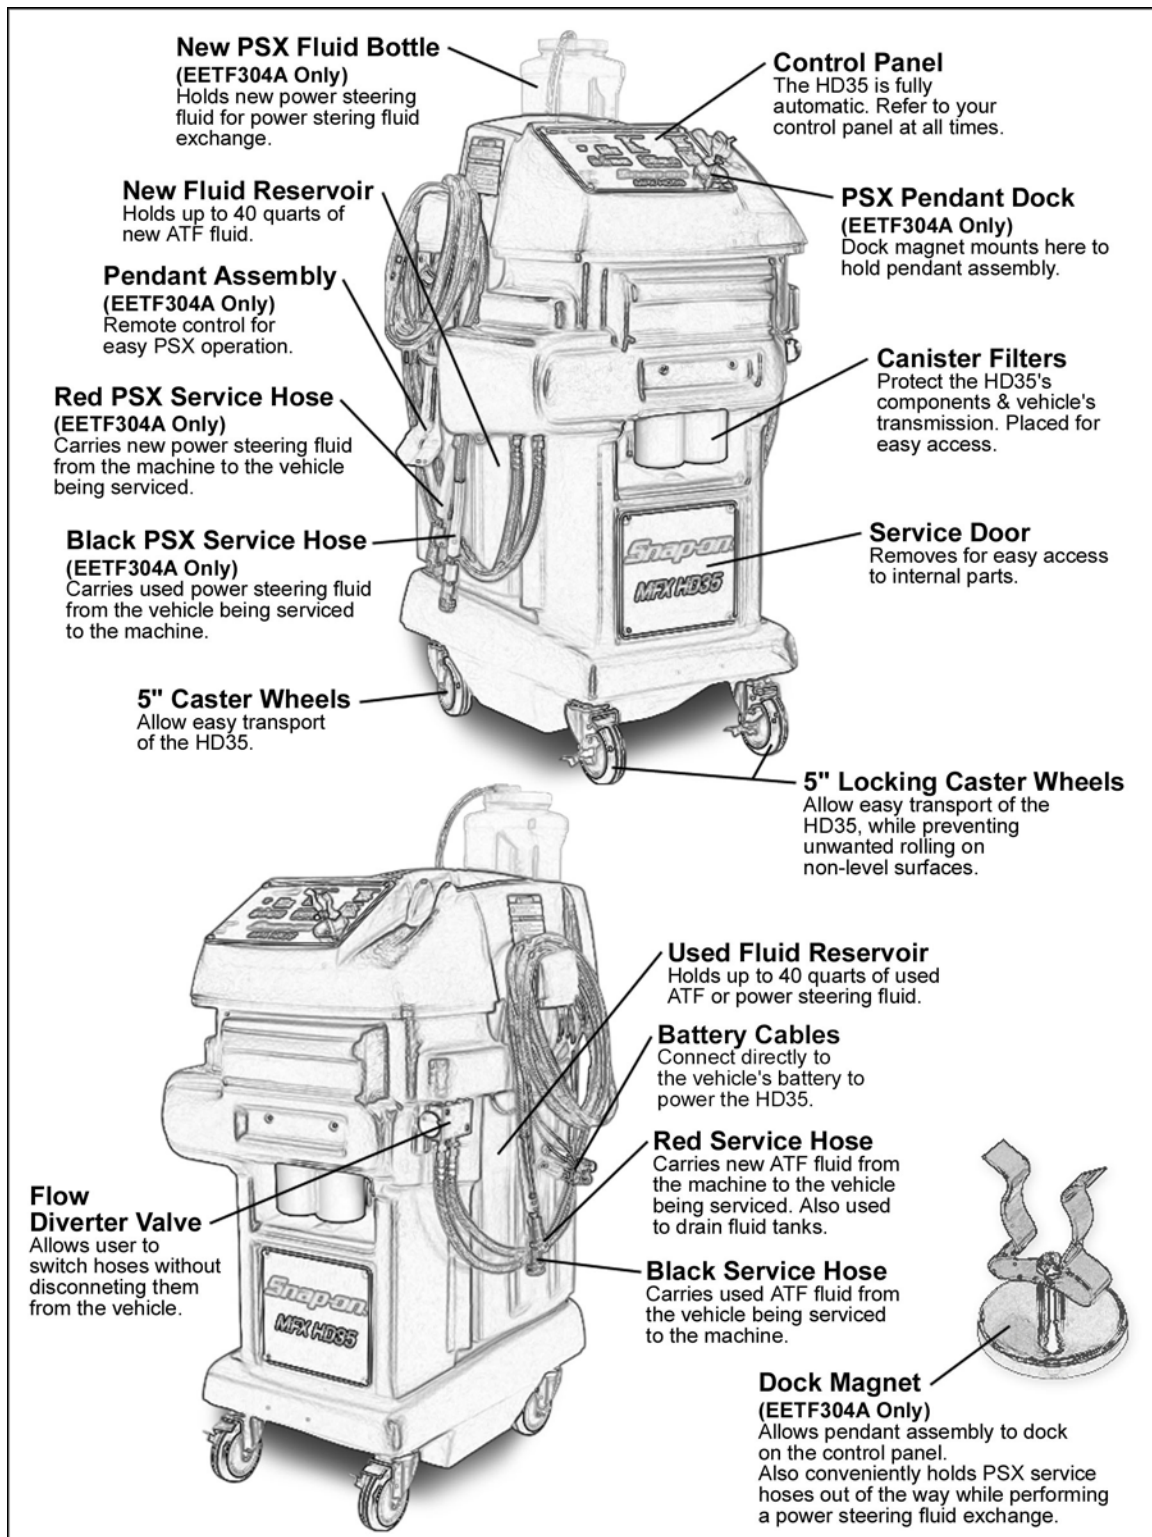

2.04 CONTROL PANEL OVERVIEW

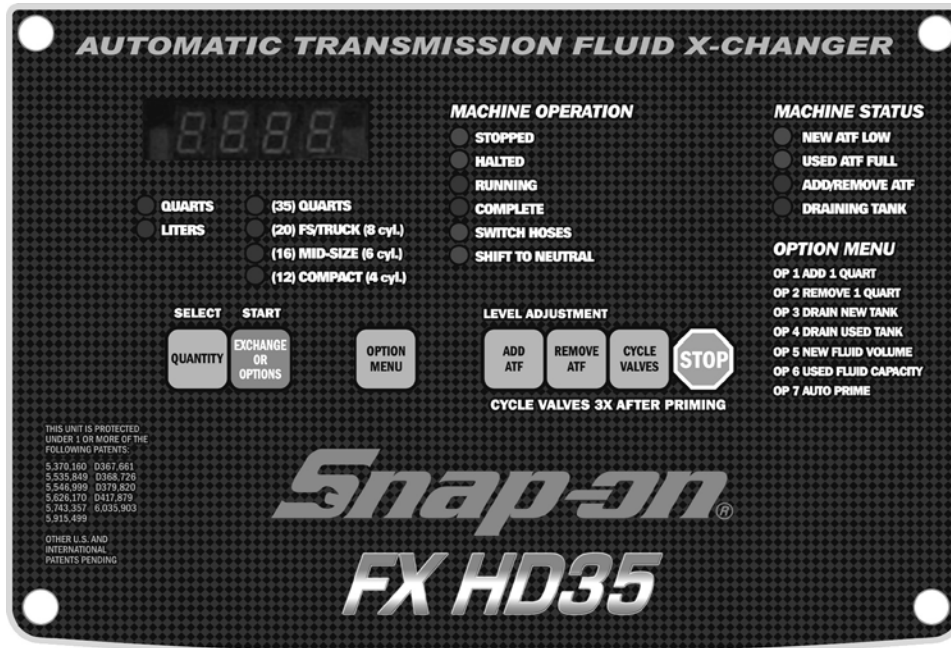

EETF303A

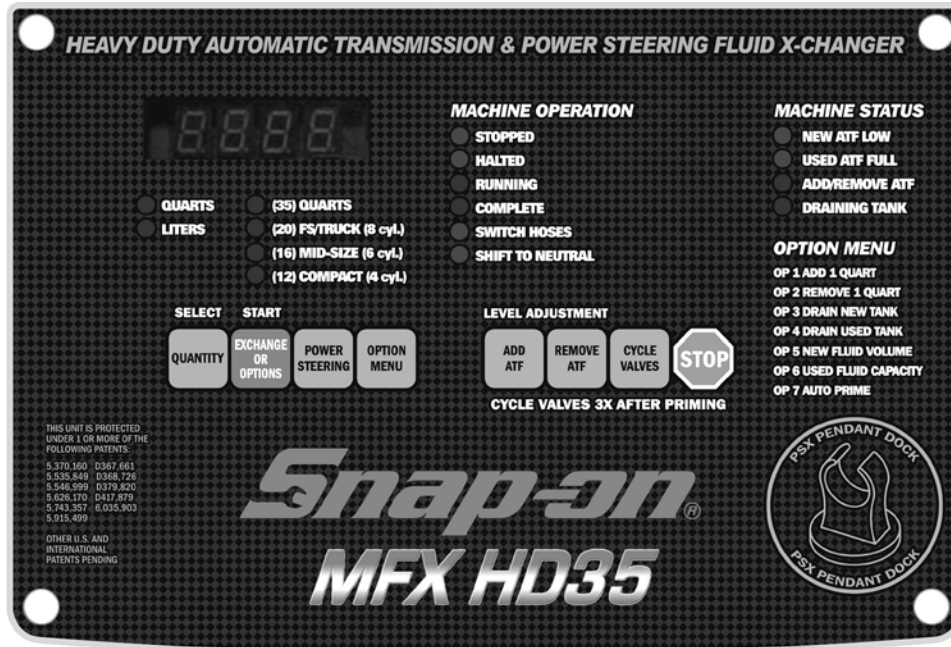

EETF304A

OPTION MENU**Option:**

OP 1 – ADD 1 QUART

OP 2 – REMOVE 1 QUART

OP 3 – DRAIN NEW TANK

OP 4 – DRAIN USED TANK

OP 5 – NEW FLUID VOLUME

OP 6 – USED FLUID CAPACITY

OP 7 – AUTO PRIME

Function:

Quickly adds fluid; Used for filling the pan.

Quickly drains fluid; Used for draining the pan.

Allows operator to drain the fluid from the new fluid tank.

Allows operator to drain the fluid from the used fluid tank.

Indicates exactly how much fluid is in the new fluid tank.

Indicates the remaining capacity of the used fluid tank.

Automatically purges any air out of the system.

BUTTONS**Button:**

SELECT / QUANTITY

START / EXCHANGE
or OPTIONS

POWER STEERING

OPTION MENU

ADD ATF

REMOVE ATF

CYCLE VALVES

STOP

Function:

Allows operator to choose one of four different exchange volumes.

Starts an exchange at the amount selected. Also activates options when selected in the option menu.

Switches machine to power steering mode.

Scrolls through options.

Adds 2/10 qt. of new ATF to the vehicle.
*(approx. 1/8" on the dipstick)*Removes 2/10 qt. of ATF from the vehicle.
(approx. 1/8" on the dipstick)

Allows operator to manually cycle both valves.

Stops operations.

MACHINE OPERATION (LED lights)

Light:

STOPPED

HALTED

RUNNING

COMPLETE

SWITCH HOSES

SHIFT TO NEUTRAL

Indication:

The machine is stopped.

The machine has halted operation.

The machine is running.

The exchange is complete.

The service hoses need to be reversed.

The vehicle needs to be shifted to neutral.

MACHINE STATUS (LED lights)

Light:

NEW ATF LOW

USED ATF FULL

ADD / REMOVE ATF

NEW / USED ATF DRAIN

Indication:

There is not enough fluid in the new fluid tank to complete the quantity selected.

The used fluid tank does not have enough remaining capacity to complete the exchange.

The operator is either adding or removing ATF.

One of the tanks is being drained.

2.05 SPECIAL FUNCTIONS

DANGER



- Wear safety goggles and protective clothing, user and bystander.
- Do not smoke, place metal tools on battery or allow a spark or flame in vicinity of battery.
- Clean battery terminals before hooking the machine's battery clips to them.
- Avoid contact with automatic transmission or power steering fluid.
- Dispose of used fluid according to environmental laws and regulations.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

• TOTALIZER CHECK

Hold "STOP" button for approximately 5 seconds.

The control panel will first display a dash with up to a 3 digit number. This number indicates how many times the totalizer has rolled over at 9999 quarts/liters. After a short delay, the total amount of fluid used since last rollover will be displayed in quarts/liters.

• COMPLETELY DRAIN TANKS

By draining the tanks using Options 3 and 4, a small amount of fluid is left in the tanks. To empty ALL the fluid, select either Option 3 or 4 by repeatedly pressing the "OPTIONS" button. Press and hold the "START" button for 13 seconds, until tank begins to drain. The pump will continue to run until the "STOP" button is pressed.

NOTE: After tanks are completely drained, the system must be primed again before another exchange is performed.

• SENSOR CHECK

This feature allows you to test the accuracy of the new and used fluid sensors.

1. Press and hold the "OPTIONS" button for at least 6 seconds, until you hear an audible beep.
2. Scroll through the options menu by repeatedly pressing the "OPTIONS" button, until "OP 8" shows on the display, followed by a number.
3. Reset this number to zero by pressing the "START" button.
4. Pour 1 quart of ATF fluid into the new fluid reservoir, and record the number that shows up on the display.
5. Scroll through the options menu until "OP 9" shows on the display, followed by a number.
6. Reset this number to zero by pressing the "START" button. Remove the used fluid screen located in the bottom of the recessed hose tray compartment.
7. Pour 1 quart of ATF fluid into the used fluid reservoir, and record the number that shows up on the display.
8. If the difference between the new and used fluid sensor values is less than 3, the sensors are within tolerance.
9. If the difference between the new and used fluid sensor values is greater than 3, repeat steps 1 - 8.
10. If the difference between the values is still greater than 3, refer to *Appendix C - Replacement Parts* to order a new board.

III. OPERATING PROCEDURES

3.01 SUGGESTED ADDITIONAL TOOLS

⚠ CAUTION

- Frequently inspect and clean any tools used, and lubricate all non-sealed ratchet mechanisms with light oil.
- The use of any other accessories not specified in this manual may create a hazard.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

Line Wrenches

3/8"
7/16"
1/2"
9/16"
5/8"
11/16"
3/4"

End Wrenches

3/8"
7/16"
1/2"
9/16"
5/8"
11/16"
3/4"

Hex Wrenches

1/8"
11/16"

Nut Drivers (American)

3/16"
1/4"
5/16"
3/8"
7/16"

Nut Drivers (Metric)

6 mm
8 mm
9 mm
10 mm
11 mm
12 mm
13 mm
14 mm

Filter Band Clamp

For replacing canister filters

Metric End or Line Wrenches

10 mm
11 mm
12 mm
13 mm
14 mm
15 mm
16 mm
17 mm
18 mm
19 mm
20 mm

Screwdrivers

Phillips	Standard
1 long	1 long
1 short	1 short

⚠ DANGER

- Vent vehicle's exhaust away from work area.
- Do not breathe exhaust.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

⚠ WARNING

- Wear safety goggles and protective clothing, user and bystander.
- Do not operate the HD35 in the vicinity of open containers of flammable liquids such as gasoline.
- This machine is equipped to operate on 12-volt DC power only.
- Do not smoke, place metal tools on battery or allow a spark or flame in vicinity of battery.
- Clean battery terminals before hooking the machine's battery clips to them. During cleaning, keep airborne corrosion from eyes, nose and mouth.
- Keep yourself, clothing, battery cables and service hoses clear of moving parts such as fan blades, belts and pulleys.
- Unless instructed otherwise, set parking brake and put gear selector in park.
- Do not leave a running vehicle unattended.
- Keep the service hoses away from hot or moving engine parts. Hoses can split or burst causing fluid to be expelled.
- Tighten all connections properly. Insufficient or excessive torque can result in fluid leakage.

⚠ CAUTION

- Use this equipment only as described in this manual. Use only the manufacturer's recommended attachments.
- Care should be taken to arrange the battery cables and service hoses so that they will not be tripped over or pulled.
- The HD35 is fully automatic. Refer to your control panel at all times.

⚠ CAUTION

- Flushing high mileage cars that have not been previously serviced can cause operating problems in the transmission.
- Never pull on the power cables or service hoses to transport the HD35. Damage may occur to these components, or machine may tip over.
- Servicing, transporting, or storing this machine in an attitude other than the normal operating position can result in fluid spillage and/or component damage.

3.02 TRANSMISSION FLUID EXCHANGE

IMPORTANT

New transmission fluid **MUST** be 65°F or above for optimal performance.

FIRST TIME OPERATION (Priming the System)

(Only necessary when machine is received, before first operation.)

System must be primed before first use.

1. Fill new fluid tank with at least 3 quarts of transmission fluid.
2. Insert *master connectors* into *service hoses* (refer to *Appendix A – Hoses & Adapters*).
3. Connect and fasten two mating *adapter hoses* together (i.e. #72 & #73).
4. Select “AUTO PRIME” (Option 7) by repeatedly pressing the “OPTION MENU” button. Press “START”. The system will automatically prime.
5. Disconnect *adapter hoses*, leaving *master connectors* attached to *service hoses*.

NOTE: *If the system does not prime, refer to Section 4.01- Common Problems/Solutions for troubleshooting.*

BASIC HOOKUP

1. Position the HD35 in front of vehicle to be serviced.
2. Refer to *Section 5.01- Adapter Hoses* to identify the specific adapter hoses required for each particular vehicle.
3. Locate and disconnect the most easily accessible hose or fitting at the radiator end of the transmission cooler system.
4. Attach the two *adapter hoses* to the vehicle. Be sure the *master connectors* are inserted into the *adapter hoses*.
5. Attach HD35's *service hoses* to the *adapter hoses*.

BASIC OPERATION

1. Check vehicle owner's manual for recommended fluid type.
2. Ensure the vehicle's battery terminals are free of any corrosion.
3. Connect the HD35's battery cables to the vehicle's battery (*refer to control panel*).
4. Start the vehicle's engine (*vehicle will automatically go into bypass*).
 - a. Check transmission fluid level.
 - b. Check for any possible leaks at connection points.
5. Using the “QUANTITY” button, select the amount of fluid required for the particular vehicle (*refer to vehicle's owner's manual*).
6. Press green “EXCHANGE” button.
7. If the exchange does not begin within 5-10 seconds, and the “Shift to Neutral” light comes on, set the vehicle's emergency brake, and shift the vehicle into Neutral. This will engage the vehicle's transmission pump. Press “EXCHANGE” again.
8. If the exchange does not begin within 5-10 seconds, and the “Reverse Machine Hoses” light comes on, turn vehicle off, switch the hoses (**leave the *master connectors* on *adapter hoses***), and then restart the vehicle and press “EXCHANGE” again.
9. After the exchange, the machine will automatically shut off (*vehicle will automatically return to bypass*) and the counter display will indicate the amount of fluid flushed.
10. Check transmission fluid level.

- a. If the level is low, push the “ADD ATF” button. This will add 2/10 qt. of fluid (approximately 1/8 of an inch on the dipstick).
- b. If the level is high, push the “REMOVE ATF” button. This will remove 2/10 qt. of fluid (approximately 1/8 of an inch on the dipstick).
11. Turn the vehicle’s engine off.
12. Disconnect the adapters (leave the *master connectors* attached to the *adapter hoses*), and connect the cooler line to the radiator.
13. Start the vehicle for final inspection.
 - a. Check transmission fluid level.
 - b. Check for any possible leaks at connection points.

DRAINING THE USED ATF FLUID

With the battery cables connected to a 12-volt battery source, connect an open-end hose (i.e. #55 w/ master connector attached) to the **red service hose (ATF side)**. Place this hose in your *waste fluid receptacle* (be sure black service hose is disconnected from vehicle and is not connected to an adapter hose) and then select “DRAIN USED TANK” (Option 4).

IMPORTANT

- Dispose of used fluid according to environmental laws and regulations.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

3.03 POWER STEERING FLUID EXCHANGE (*EETF304A Only*)

NOTE: When in Power Steering mode, the used fluid tank is constantly monitored. To prevent overfilling, if the used fluid tank becomes too full the system will disable the “DRAIN” button on the pendant, and audible alarm will sound, and the “Drain Used Fluid” LED will light up. At this point the “FILL” button on the pendant will remain active, but the “DRAIN” button is disabled.

1. Ensure the vehicle’s battery terminals are free of any corrosion.
2. Attach the HD35’s battery clips to the vehicle’s battery terminals.
3. Activate power steering mode by pressing “POWER STEERING” button. The display will show “PS” to indicate it is in power steering mode.
4. Remove cap from power steering fluid reservoir (and screen if applicable).
5. With the vehicle’s engine running, place hoses (same length) into power steering fluid reservoir. Use the included dock magnet to hold the hoses in place.
6. Turn the ball valves to the “on” position on both hoses.
7. While watching the fluid level in the reservoir, use the “DRAIN” and “ADD” buttons on the remote pendant to repeatedly drain and add fluid. Repeated purging and adding of fluid will flush the old fluid out of the reservoir.
8. Turn the vehicle’s steering wheel all the way to the left, then all the way to the right, and back to center.
9. Check the color of the fluid in the reservoir to ensure a clean exchange. Repeat steps 7 & 8 if necessary.
10. When finished, adjust fluid level, turn the ball valves to the “off” position on both hoses, and remove hoses from power steering fluid reservoir.
11. Turn off vehicle’s engine, and replace reservoir cap and screen (if applicable).

To return to ATF mode, either press the “POWER STEERING” button again, or disconnect battery cables, and then reconnect.

IV. TROUBLESHOOTING & ADDITIONAL HELP

⚠ DANGER



- Vent vehicle's exhaust away from work area.
- Do not breathe exhaust.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

⚠ WARNING



- Wear safety goggles and protective clothing, user and bystander.
- Do not operate the HD35 in the vicinity of open containers of flammable liquids such as gasoline.
- This machine is equipped to operate on 12-volt DC power only.
- Do not smoke, place metal tools on battery or allow a spark or flame in vicinity of battery.
- Clean battery terminals before hooking the machine's battery clips to them. During cleaning, keep airborne corrosion from eyes, nose and mouth.
- Keep yourself, clothing, battery cables and service hoses clear of hot or moving engine parts such as fan blades, belts and pulleys.
- Block drive wheels before starting vehicle's engine to begin an exchange.
- Unless instructed otherwise, set parking brake and put gear selector in park.
- Do not leave a running vehicle unattended.
- Tighten all connections properly. Insufficient or excessive torque can result in fluid leakage.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

⚠ CAUTION



- Wear safety goggles and protective clothing, user and bystander.
- Avoid contact with automatic transmission fluid.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

⚠ CAUTION

- Frequently inspect and clean any tools used, and lubricate all non-sealed ratchet mechanisms with light oil.
- The use of any other accessories not specified in this manual may create a hazard.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

4.01 COMMON PROBLEMS / SOLUTIONS

Problem: *System does not power up, or operates erratically.*

Solution: Check battery connection. Make sure there are no loose connections, and the machine's battery clips are not reversed. Remove all corrosion from the battery terminals.

Problem: *Exchange does not start within 5-10 seconds, and "Shift to Neutral" LED lights up.*

Solution: Set the vehicle's emergency brake and shift the vehicle into Neutral. This will engage the vehicle's transmission pump. Press "EXCHANGE" again.

Problem: *Exchange does not start within 5-10 seconds, and "Reverse Machine Hoses" LED lights up.*

Solution: Pull black knob on diverter valve, and press "EXCHANGE" again.

Problem: *Either New or Used fluid tank will not drain.*

Solution: Tanks may not drain through the Black service hose. Make sure tanks are being drained through the RED service hose.

Problem: *Machine operation becomes slow.*

Solution: Make sure fluid temperature is at least 65°F. If machine is still slow, replace filters.

Problem: *Machine stops after starting an exchange.*

Solution: Make sure system has been primed, and new transmission fluid is at least 65°F.

Problem: *After starting an exchange, the machine powers off.*

Solution 1: The fuse is blown. Disconnect the battery cables, wait 15 seconds, and then re-connect to reset the fuse.

Solution 2: If the fuse blows again, replace the filters and try again.

4.02 CUSTOMER SERVICE CONTACT INFORMATION

If you are still experiencing problems, call technical support at:

1-800-225-5786 (U.S.)

1-800-661-1786 (Canada)









V. APPENDIX A – HOSES & ADAPTERS

⚠ CAUTION













- Do not replace worn parts individually. If adapter hose fittings become worn, see “Appendix C – Replacement Parts” to order new hoses.
- The use of any other accessories not specified in this manual may create a hazard.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.


5.01 ADAPTER HOSES

STANDARD HOSES


	-Green-	5/8"-18 [F] SAE 45° Flare - Swivel (Chrysler - 1993 and Newer)
941801- Hose #51 (Mates with #52)		
	-Green-	5/8"-18 [M] SAE 45° Flare (Chrysler)
941802- Hose #52 (Mates with #51)		
	-Blue-	5/8"-18 [M] SAE 45° Flare - Swivel (General Motors with 3/8" Tube Diameter Lines - All Years)
941803- Hose #53 (Mates with #57)		
	-Black-	3/8" Diameter Hose [F] Open End Hose w/Clamp (Import - 1987 and Newer)
941805- Hose #55 (Mates with Step Fitting)		
	-Blue-	5/8"-18 [F] SAE 45° Inverted (General Motors with 3/8" Tube Diameter Lines - 1997 and Newer)
941807- Hose #57 (Mates with #53)		
	-Black-	1/2" Diameter Hose [F] Open End Hose w/Clamp (Import)
941809- Hose #59 (Mates with Step Fitting)		
	-Black-	5/16" Diameter Hose [F] Open End Hose w/Clamp (Import)
941813- Hose #63 (Mates with Step Fitting)		
	-Green-	1/4"-18 [M] NPTF (Jeep Cherokee- 1980-1986)
941815- Hose #65 (Mates with #75)		

(Continued on next page)


	-Red-	1/2"-20 [F] SAE 45° Inverted (Chrysler, Ford Aerostar, Jaguar, Mercedes, & Cadillac-1985 and Newer) * Needs Ford Slide Tool 940140 for Aerostar / Windstar
941816- Hose #66 (Mates with #67)		
	-Red-	1/2"-20 [M] SAE 45° (Chrysler and Ford)
941817- Hose #67 (Mates with #66)		
	-Red-	5/8"-18 [M] SAE Inverted - Swivel (Ford With Large Nut Adapter - 1980 and Newer)
941818- Hose #68 (Mates with #69)		
	-Red-	5/8"-18 [F] SAE Inverted (Ford)
941819- Hose #69 (Mates with #68)		
	-Blue-	1/2"-20 [M] SAE 90° Inverted - Swivel (General Motors with 5/16" Tube Diameter Lines - All Years)
941820- Hose #70 (Mates with #71)		
	-Blue-	1/2"-20 [F] SAE Inverted (General Motors)
941821- Hose #71 (Mates with #70)		
	-Red-	1/2"-20 [F] SAE Inverted (Ford)
941822- Hose #72 (Mates with #73)		
	-Red-	1/2"-20 [M] SAE 90° Inverted - Swivel (Ford 5/16" Small / Long Nut Adapter - 1980 and Newer)
941823- Hose #73 (Mates with #72)		
	-Green-	M14 x 1.5 [F] Swivel O-ring (Jeep Cherokee, Ford Escort - 1980-1986)
941825- Hose #75 (Mates with #65)		
	-Red-	M14 [F] Banjo Fitting (Ford Escort – 1994 and Newer)
940874- Hose #78 (Mates with #79)		
	-Red-	M14 x 1.5 [M] Bolt w/ 2 Washers (Ford Escort - 1994 and Newer)
940875- Hose #79 (Mates with #78)		
	-Black-	1/4" [M] Universal Bump Fitting (Import)
941828- Hose #80 (Mates with #81)		

- 


941829- Hose #81
(Mates with #80)

-Black- 1/4" Diameter Hose [F]
Open End Hose w/Clamp
(Import)
- 


941830- Hose #82
(Mates with #63)

-Black- 5/16" [M]
Universal Bump Fitting
(Infiniti, Lexus, and BMW - 1980 and Newer)
- 


941831- Hose #83
(Mates with #55)

-Black- 3/8" [M]
Universal Bump Fitting
(Toyota, Nissan, Honda, Ford and Chrysler - 1975 and Newer)
- 


941832- Hose #84
(Mates with #59)

-Black- 1/2" [M]
Universal Bump Fitting
(Toyota, Nissan and Honda - 1980 and Newer)
- 


941835- Hose #87
(Mates with #88)

-Green- 9/16"-18 [M]
JIC 37° Flare - Inverted
(Dodge Durango/Dakota - All Years)
- 

941836- Hose #88
(Mates with #87)

-Green- 9/16"-18 [F]
JIC 37° Flare - Swivel
(Dodge Durango/Dakota - All Years)
- 


941841- Hose #89
(Mates with #90)

-Black- 3/4"-16 [M]
SAE O-Ring
(Chevy DuraMax w/Allison Transmission – 2001 & Newer)
- 


941842- Hose #90
(Mates with #89)

-Black- 3/4"-16 [F]
SAE O-Ring Adapter
(Chevy DuraMax w/Allison Transmission – 2001 & Newer)


ALLISON HOSES (Optional)

- 


941844- Hose #134
(Mates with #135)

-Black- **MD3060, MD3066, & MD3560 Series**
[Male]
- 

941845- Hose #135
(Mates with #134)


-Black- **MD3060, MD3066, & MD3560 Series**
[Female]
- 


941846- Hose #136
(Mates with #137)

-Black- **1000, 2000 & 3000 Series**
[Male]
- 

941847- Hose #137
(Mates with #136)


-Black- **1000, 2000 & 3000 Series**
[Female]

 -Black- **HD4060 & HD4560 Series**
941848- Hose #138
 (Mates with #139)
 [Female]

 -Black- **HD4060 & HD4560 Series**
941849- Hose #139
 (Mates with #138)
 [Male]

 -Black- **AT545 Series**
941850- Hose #140
 (Mates with #141)
 [Female]

 -Black- **AT545 Series**
941851- Hose #141
 (Mates with #140)
 [Male]


940837
 (EETF304A Only) 12" Tube with Air Nipple
 (All Vehicles)

5.02 ADAPTERS

The following adapters allow quick and easy hookup to virtually any vehicle make and model.



940328
 1/2" Adapter



942163
 GM Adapter



942162
 Quick Disconnect Tool



940329
 3/8" Adapter



940334
 5/16" Adapter



940831
 Master Hose Connector

VI. APPENDIX B – MAINTENANCE

NOTE: *The Snap-on HD35 requires a minimal amount of maintenance.*

⚠ CAUTION

- Frequently inspect and clean any tools used, and lubricate all non-sealed ratchet mechanisms with light oil.
- The use of any other accessories not specified in this manual may create a hazard.
- Read, understand and follow Safety Instructions in the front pages of this manual and on product safety labels.

6.01 MAINTENANCE PROCEDURES

- **Replace Canister Filters (Part#: 940796) every 50 exchanges, or as needed**
Use a standard filter band clamp tool to unscrew old filters, and replace them with new filters. Make sure new filters are on tight.
- **Clean Filter Screen (EETF304A Only) every 50 exchanges, or as needed**
Remove service door using appropriate tool. Open filter screen housing by unscrewing the top. Use a sharp pick to remove screen from housing. Clean using degreaser and brush, and blow out with air compressor. Put screen back in housing.
- **Clean Used Fluid Screen (Located in bottom of recessed hose tray area)**
This helps eliminate surface tension caused by debris and contamination from the air. Using a sharp pick, remove screen. Clean using degreaser and brush, and blow out with air compressor.
- **Wipe Down Exterior using a soft, damp cloth.**








VII. APPENDIX C – REPLACEMENT PARTS




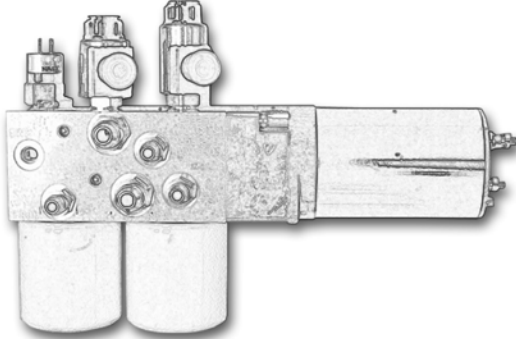



7.01 REPLACEMENT PART LIST

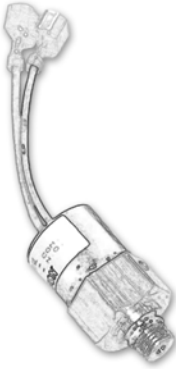Part #	Description
NOR940969	Control Panel w/ Elec. Board & Label (EETF304A) [MFX]
NOR941403	Control Panel w/ Elec. Board & Label (EETF303A) [FX]
NOR941210	Battery Cable Assembly
NOR940473	Motor Control Board
NOR940469	Sensor Rod
NOR941167	5/8" Fluid Tube
NOR941226	Fluid Tube Elbow Fitting
NOR940551	PSX Fill Pump [EETF304A Only]
NOR940470	Manifold/Pump Assembly
NOR940843	Pressure Switch (Factory preset to 6 psi)
NOR940839	3/2 Solenoid Valve [Size 8] (S1)
NOR940840	3/2 Solenoid Valve [Size 10] (S2)
NOR940841	Coil with Spade Connector [Size 8] (S1)
NOR940842	Coil with Spade Connector [Size 10] (S2)
NOR940775	Standard Hose Kit
NOR941168	Allison Hose Kit
NOR940927	Hose Tray
NOR941220	Hose Rack
NOR941171	Internal Hose Kit
NOR940328	1/2 Adapter
NOR940329	3/8 Adapter
NOR940334	5/16 Adapter
NOR942162	Quick Disconnect Tool
NOR942163	GM Adapter
NOR940831	Master Hose Connector
NOR940785	Service Hose Black
NOR940786	Service Hose Red
NOR940787	Service Hose Black (PSX) [EETF304A Only]
NOR940788	Service Hose Red (PSX) [EETF304A Only]
NOR940837	12" Tube w/ Air Nipple (PSX) [EETF304A Only]
NOR940834	Pendant Assembly (PSX) [EETF304A Only]
NOR940663	Pendant Switch (PSX) [EETF304A Only]
NOR940922	Dock Magnet (PSX) [EETF304A Only]
NOR940913	New Power Steering Fluid Bottle [EETF304A Only]

NOR941162	Chassis Kent Gray
NOR941163	Top Sink Kent Gray
NOR941164	Console Kent Gray
NOR942113	Tank Cap
NOR941160	Red Tank - New Fluid
NOR941161	Red Tank - Waste Fluid
NOR940970	Service Door with Label (EETF304A) [MFX]
NOR941404	Service Door with Label (EETF303A) [FX]
NOR942118	Locking Caster Wheel
NOR942137	Caster Wheel
NOR940905	Vinyl Mat
NOR940796	Canister Filter
NOR940552	In-Line Filter (PSX)
NOR942150	Used Fluid Screen (1 1/4" Diameter)
NOR941209	Operations Manual
NOR941208	Operational Overview / Hose Chart
NOR940844	Adapter Instruction Sheet
NOR940851	Snap-on Marketing Kit
NOR940872	Filter/Brochure Kit
	<i>Shipping Carton Package</i>
NOR940779	Top / Bottom Tray
NOR940781	Tube

7.02 REPLACEMENT PART ILLUSTRATIONS

 <p>NOR940470 <i>Manifold / Pump Assembly</i></p>		
 <p>NOR940473 <i>Sensor Control Box</i></p>	 <p>NOR940469 <i>Sensor Rod</i></p>	 <p>NOR941167 <i>5/8" Fluid Tube</i> NOR941226 <i>Fluid Tube Elbow Fitting</i></p>
 <p>NOR940843 <i>Pressure Switch</i></p>	 <p>NOR940839 <i>3/2 Solenoid Valve [Size 8] (S1)</i> NOR940840 <i>3/2 Solenoid Valve [Size 10] (S2)</i></p>	 <p>NOR940841 or NOR940842 <i>Coil with Spade Connector Size 8 (S1) or Size 10 (S2)</i></p>

 <p>NOR940905 Vinyl Mat</p>	 <p>NOR940796 Canister Filter</p>	 <p>NOR942150 Used Fluid Screen</p>
 <p>NOR940927 Hose Tray</p>	 <p>NOR941220 Hose Rack (Hoses Not Included)</p>	 <p>NOR942137 Caster NOR942118 Locking Caster</p>
 <p>NOR940872 Filter / Brochure Kit (Contains 2 replacement canister filters and 125 Sales Brochures)</p>		

7.03 ORDERING INFORMATION

To order replacement parts for the Snap-on HD35 SERIES, call:

1-800-225-5786 (U.S.)

1-800-661-1786 (Canada)

LIMITED ONE (1) YEAR WARRANTY

Snap-on EETF303A & EETF304A

Snap-on warrants only to the original Purchaser that under normal use, care and service, the Equipment (except as otherwise provided herein) shall be free from defects in material and workmanship for one year from the date of original invoice. External hoses, remote control modules, adapters and all other attachments, supplies and consumables (except as otherwise provided herein) are warranted for 90 calendar days from the date of original invoice. Filter elements are not warranted. Printed circuit boards purchased from, but not installed by Seller are not warranted.

SELLER'S OBLIGATIONS UNDER THIS WARRANTY ARE LIMITED SOLELY TO THE REPAIR OR, AT SELLER'S OPTION, REPLACEMENT OF EQUIPMENT OR PARTS WHICH TO SELLER'S SATISFACTION ARE DETERMINED TO BE DEFECTIVE AND WHICH ARE NECESSARY, IN SELLER'S JUDGEMENT, TO RETURN THE EQUIPMENT TO GOOD OPERATING CONDITION. NO OTHER WARRANTIES EXPRESS OR IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY AND ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED.

This warranty does not cover (and separate charges for parts, labor and related expenses shall apply to) any damage to, malfunctioning, inoperability or improper operation of the Equipment caused by, resulting from or attributable to (A) abuse, misuse or tampering; (B) alteration, modification or adjustment of the Equipment by anyone other than Seller's authorized representatives; (D) improper or negligent use, application, operation, care, cleaning, storage or handling; (E) fire, water, wind, lightning or other natural causes; (F) adverse environmental conditions, including, without limitation, excessive heat, moisture, corrosive elements, or dust or other air contaminants, radio frequency interference, electric power failure, power line voltages beyond those specified for the equipment, unusual physical, electrical or electromagnetic stress, and/or any other condition outside of Seller's environmental specifications; (G) use of the Equipment in combination or connection with other equipment, attachments, supplies or consumables not manufactured or supplied by Seller; or (H) failure to comply with any applicable federal, state or local regulation.

Repairs or replacements qualifying under this Warranty will be performed on regular business days during Seller's normal working hours within a reasonable time following Purchaser's request. **All requests for Warranty service must be made during the stated Warranty period.** This warranty is non-transferable.



Snap-on®

www.snapon.com

HD35 SERIES

© Copyright 2003 Snap-on Technologies, Inc.
All rights reserved. FX HD35 and MFX HD35 are
trademarks of Snap-on Tools Company.

Snap-on is a trademark of Snap-on Technologies, Inc.

Printed in the U.S.A.
Nov 2003

ZEETF303A
ZEETF304A