

BLACKHAWK®

Post-Lift



Compatible with the Shark® Frame Measurement System (Not Included)

Post-Lift Features & Technical Specifications

The Post-Lift is a powerful 10 ton 360 degree, versatile workstation that allows one to work as close to the vehicle as possible. Technicians value being able to place the work at a height they are most comfortable with. Shop managers love it that when not in use it can be stored in a pit, to open up the bay for multi uses.



Fast and Easy Vehicle Setup




Optional BHPLT14 Vector Pulling Arm

POST-LIFT FEATURES

- Compact and robust lift, great lifting height
- Compatible with electronic or mechanical measuring system
- Great pulling force, Dozer with 10T ram
- Max lifting height on table: 66.93" (1,700 mm)
- Max lifting height on clamps: 82.68" (2,100 mm)
- Optimal force of scissor lifting
- Lifting capacity: 5,512 lbs (2,5T)

OPTIONAL ACCESSORIES

- Pit Frame for In-Floor Installation (BHPL10PF)
- Cover Plate (BHPL100 CP)
- Ramps for Vehicles with Low Ground Clearance (BHPL104)

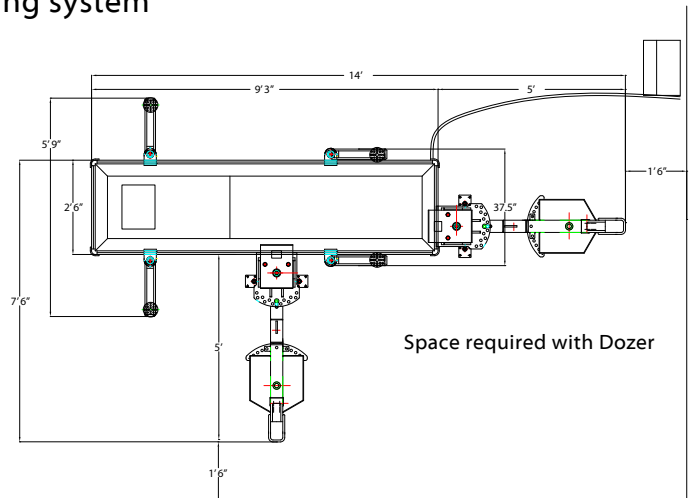

TECHNICAL SPECIFICATIONS

- | | |
|---|----------------------|
| • Part Number: | BHPL10CUS |
| • Electric Pump: | 220V 1Ph 60Hz |
| • Maximum Lifting Height of Table: | 67" (1,700 mm) |
| • Maximum Height of Anchored Vehicle's Underbody: | 83" (2,100 mm) |
| • Minimum Thickness of Frame: | 4.5" (115 mm) |
| • Lifting Capacity: | 5,512 lbs (2,500 kg) |
| • Total Weight: | 2,866 lbs (1,300 kg) |

Snap-on Equipment • Blackhawk / 309 Exchange Avenue / Conway, Arkansas 72032 U.S.A.
Fax: 501-450-2085 / Toll Free: 1-877-482-4866 / www.blackhawkcr.com