


**BLACKHAWK**

*Power-Pro*<sup>®</sup> SL


*Power-Pro*<sup>®</sup> SLT

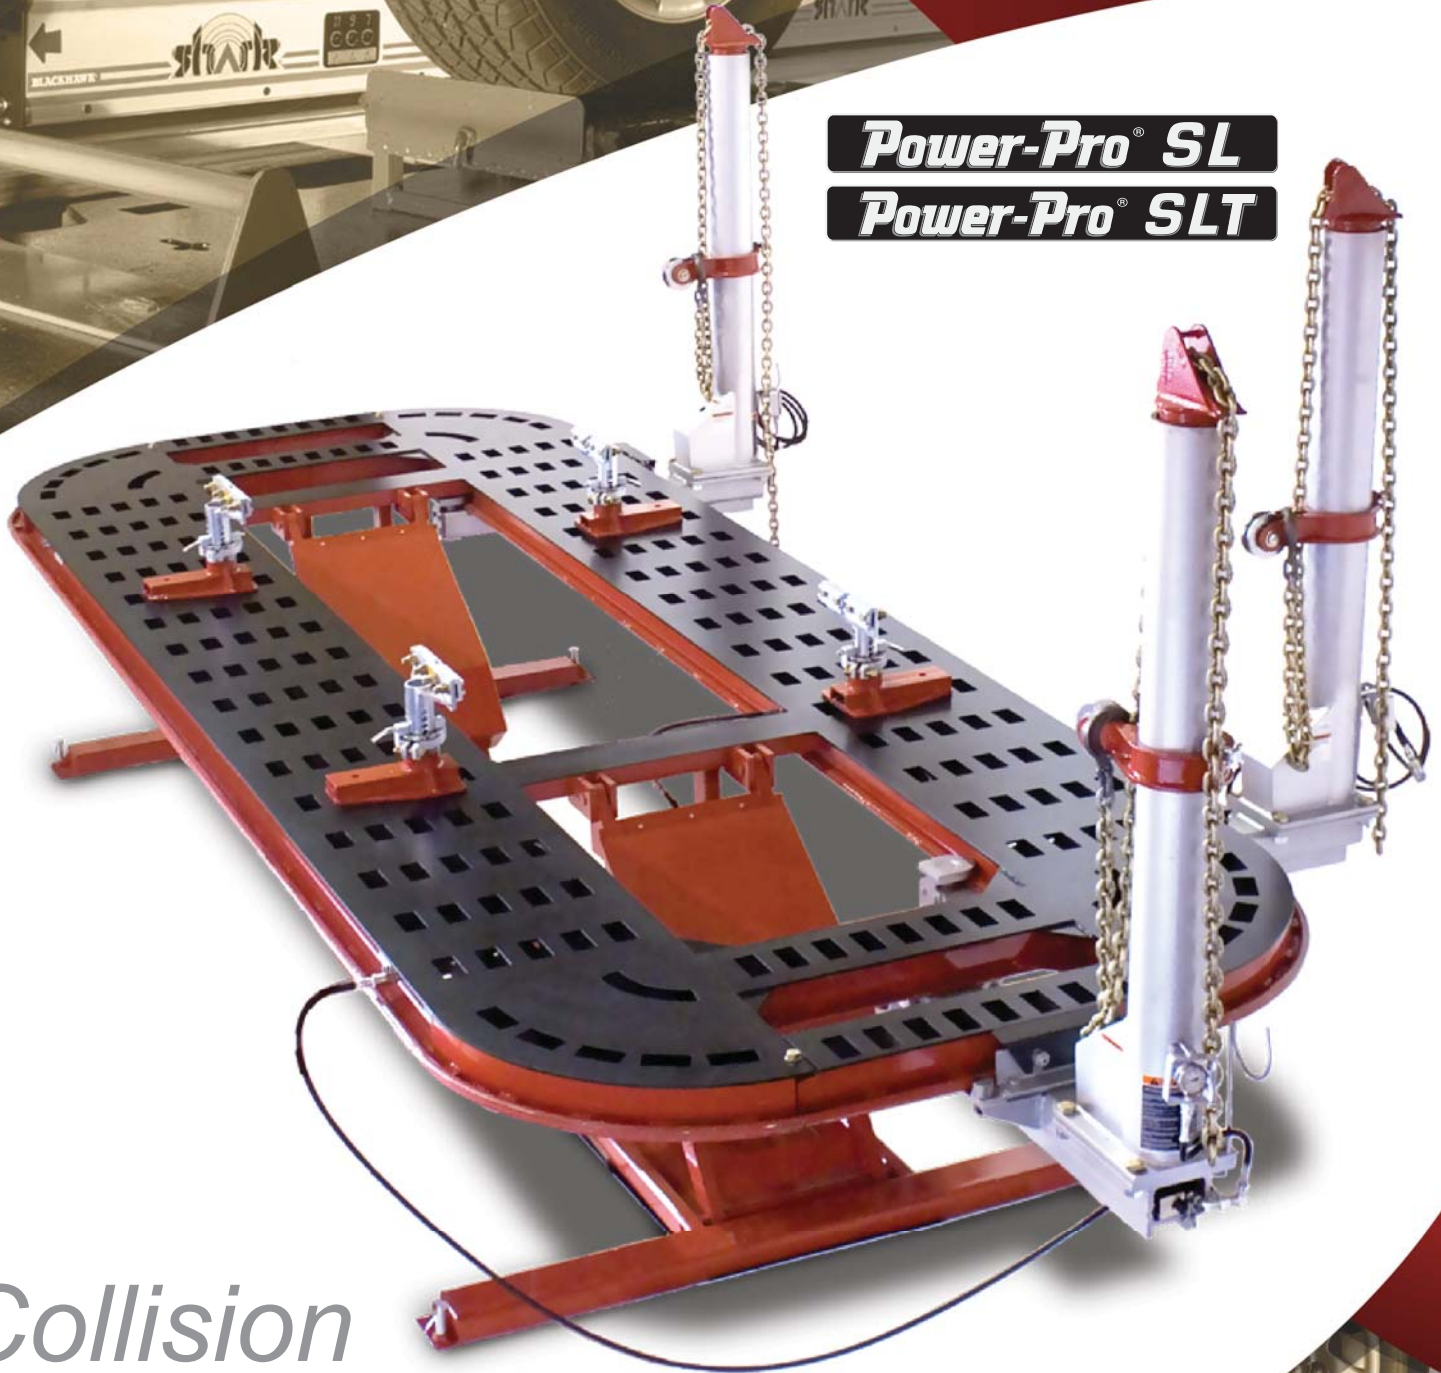

*Collision  
Frame Racks*

## Power & Performance

The Power-Pro SL rack offers features designed specifically for today's collision repair business. To assure maximum productivity, the rack includes an extended-height lifting capability for easier access to the vehicle. The open front and rear improves accessibility to the vehicle for repairs. The Power-Pro SL incorporates a faster pinch-weld anchoring system with fewer bolts to secure it to the rack platform and includes more chain tie-downs for efficient and timely vehicle tie backs.

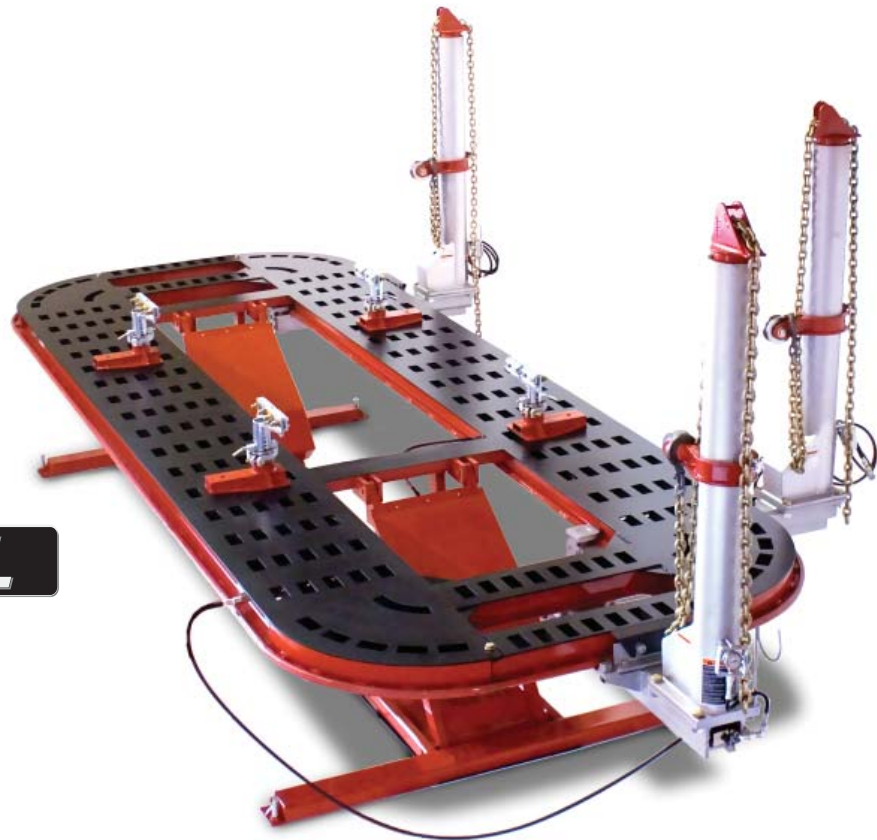

### Power-Pro® SL

Power-Pro 3000 SL  
3-Tower Configuration  
BH9014223

## Specifications

	Power-Pro 2000 SL	Power-Pro 3000 SL
Rack Length:	20'	22'
Rack Max. Length (with towers):	24' 1"	26' 1"
Width of Rack:	88"	88"
Width of Rack (with towers):	12' 2"	12' 2"
Width of Treadway:	26 1/2"	26 1/2"
Center Opening Width:	35 1/2"	35 1/2"
Maximum Overall Height (towers down):	9' 1"	9' 1"
Maximum Overall Height (towers extended):	9' 11"	9' 11"
Minimum Overall Height (towers down):	6' 7"	6' 7"
Minimum Overall Height (towers extended):	8' 11"	8' 11"
Tie-Downs:	222	244
8 Working Heights:	12" up to 42"	12" up to 42"
Lifting Capacity:	9,000 lbs	9,000 lbs
Pulling Capacity:	10 ton	10 ton
Power Requirement:	120V, 1Ph, 60Hz	120V, 1Ph, 60Hz

# Power-Pro SL Features



## Electric-Hydraulic Couplers (SL Only)

Ten quick-connect electric-hydraulic couplers are conveniently located around the rack for efficient tower connections or for auxiliary hydraulic repair accessories. The couplers provide for a positive seal and allow for a safe, clean operating environment for your technicians.

## Working Heights (SL Only)

Eight working heights from 12" to 42" provide for one of the lowest working heights in the market. Adjustable working heights provide flexibility in properly positioning the vehicle at an optimum working height for ultimate productivity boosts!



## Electric Pump (SL Only)

Elevated off of the ground and placed in a sound-proof metal enclosure with a push-button lock release located on top. Remote easily stores inside the enclosure when not in use.



## Tower Gauges (SL Only)

Water-filled pressure gauges can be adjusted to provide the technician with the best line of sight when making 10 ton pulls at the hook.

## Light-Weight Steel Ramps with Handles (SL Only)


For loading & off-loading the vehicle from the front or rear of the rack.



## Versatile & Productive

For those customers looking same features and benefits found on the SL series frame rack but in an air tilt version, Blackhawk Power-Pro SLT series racks will provide the versatility you are looking for.


### Power-Pro® SLT

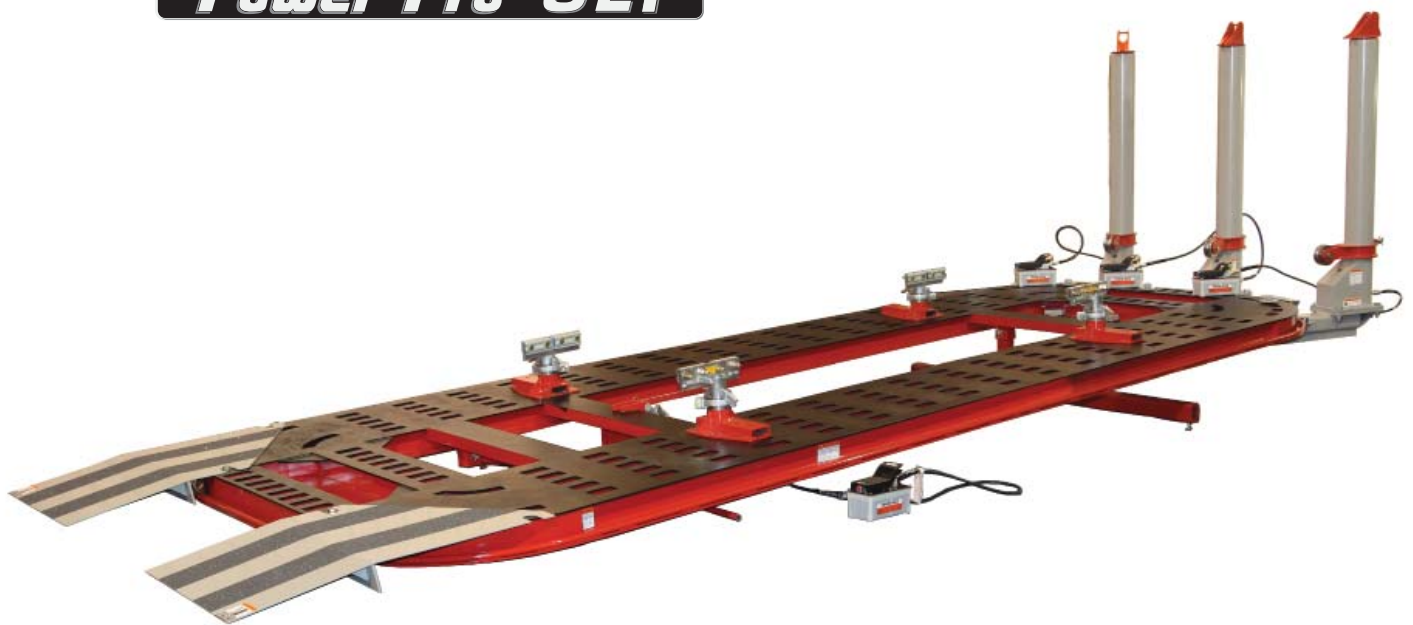

## Specifications

	Power-Pro 2000 SLT	Power-Pro 3000 SLT
Rack Length:	20'	22'
Rack Max. Length (with ramps):	21' 6"	23' 6"
Rack Max. Length (with towers and ramps):	24' 4"	26' 4"
Width of Rack:	88"	88"
Width of Rack (with towers):	12' 2"	12' 2"
Width of Treadway:	26 1/2"	26 1/2"
Center Opening Width:	35 1/2"	35 1/2"
Overall Height (towers down):	7' 7"	7' 7"
Overall Height (towers extended):	8' 5"	8' 5"
Tie-Downs:	222	244
Working Height:	22"	22"
Lifting Capacity:	10,000 lbs	10,000 lbs
Pulling Capacity:	10 ton	10 ton
Power Requirement:	AIR	AIR

# Power-Pro SLT Features

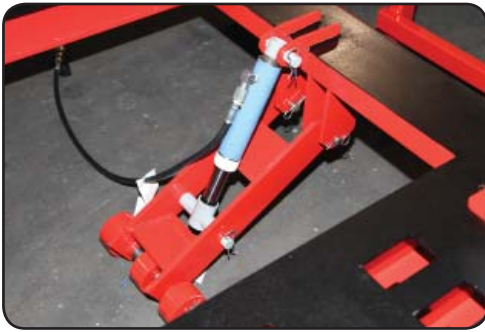

## Lifting Power (SLT Only)

10,000 lbs lifting capacity provides you with more than enough strength to pick up the vehicles you will encounter.




## Quick Loading (SLT Only)

The Blackhawk Power-Pro SLT's removable drive-on ramps coupled with the platform hydraulic tilt feature facilitates easy drive on vehicle loading.



## Air Hydraulics Pumps with Gauges (SLT Only)


Fluid filled gauges provide for reliable pressure readings at the hook.

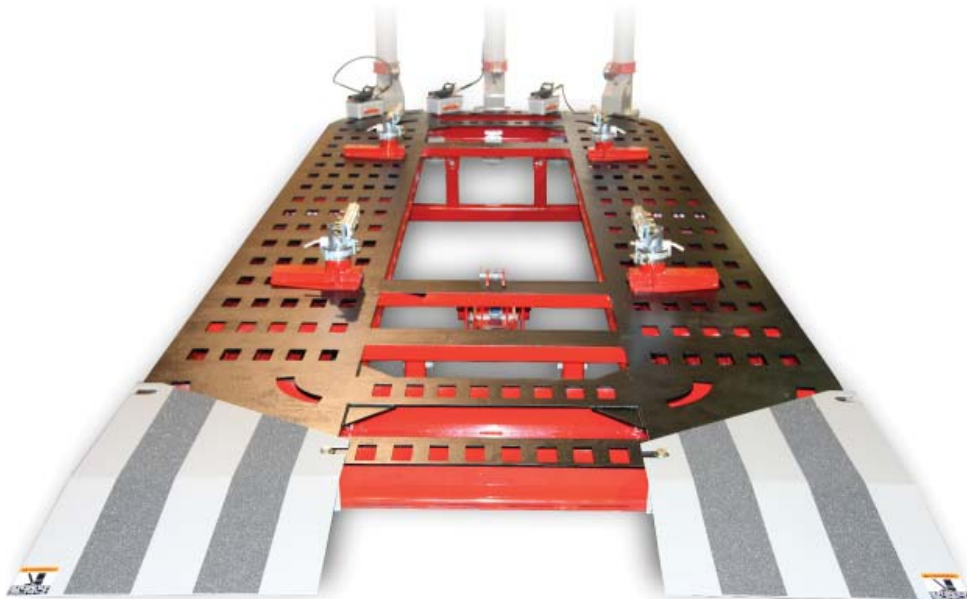

## Power-Pro SL/SLT Features

### Towers with Integrated Bearings

Towers circumnavigate the rack platform on six bearings for a smooth effortless operation.

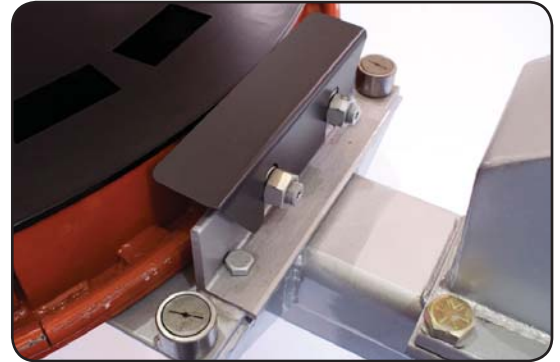


### Infinite Positioning of Pull Collars

Variable-position pull collars provide for unlimited positioning for the correct alignment with the pull being made.




### Pinch-Weld Clamp

Pinch-Weld Clamp base secures to the rack with a single bolt reducing your vehicle set-up times.

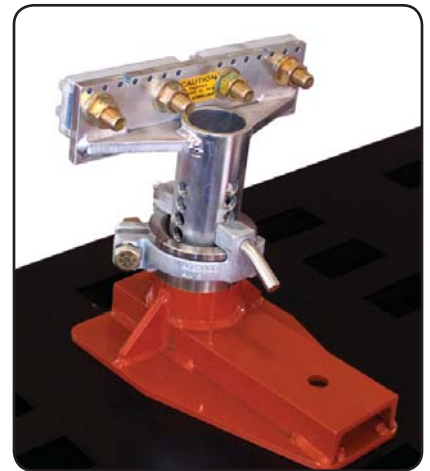


### Bed Liner Top Coat

The deck surface is prepared with a bed liner top coat for durability and a non slip surface.

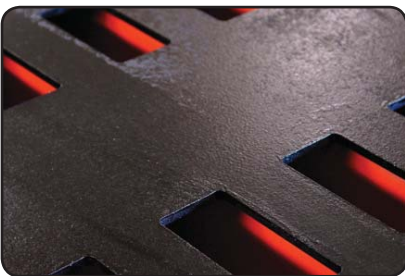


### Front and Rear Removable Cross-Members

Perform a front-end pull removing damage, and then remove the cross-member to gain unrestricted access to the vehicle.

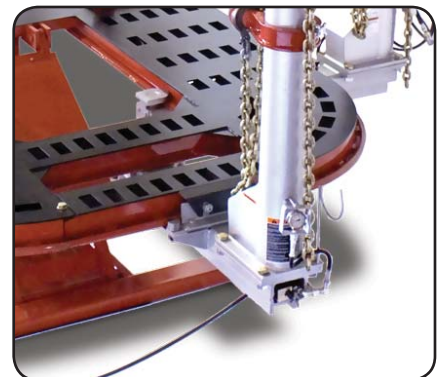

# Optional Accessories

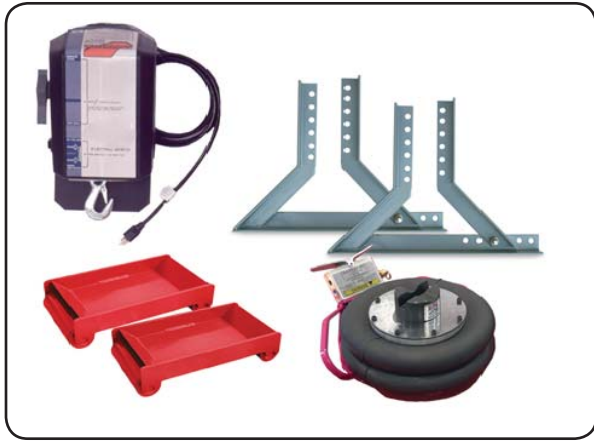

## Vehicle Loading Package

9020030 (Includes: winch, wheel stands, car dollies, and 2 bag air jack)



## Pushing Post with Ram and Pump

9033123



## Overhead Pull with Collar

9025050




## Light Duty Frame Anchoring

SL59319



## Down Pull

9033160

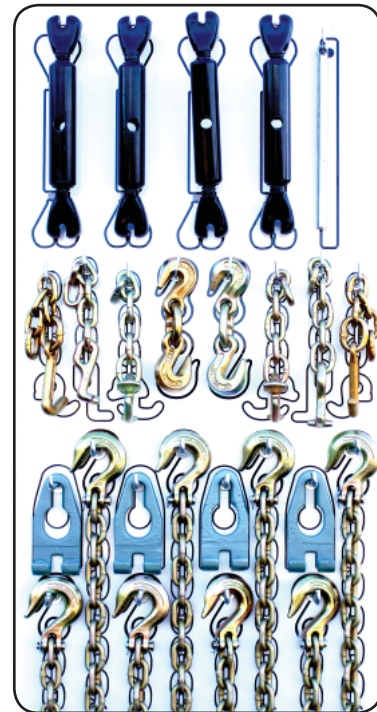

## Truck Tie-Down Board

9020026 (Includes: 4 chain tighteners and helper bar, 2 GM R hooks, 2 Ford T hooks, 2 Chrysler S hooks, 2 double grab hooks, 4 trac hooks, 4 4'x13/32 chains with slip hooks, 4 6'x13/32 chains with slip hooks)

# Features and Benefits

**Light-weight Drive-on/Drive-off Ramps**  
Provide drive-through capability (SL Only)

**From 222 to 244 Tie-Downs**  
Efficient and timely vehicle tie-back, just drop the chain through deck and secure

**Front & Rear Removable Cross-Members**  
Gain complete access to vehicle for repairs

**Front & Rear Wheel Chocks**  
Prevents forward and backward movement of the vehicle

**Quick-Connect Hydraulic Couplers**  
Allowing for a safe and clean work space

**One-Bolt Pinch-Weld Base Clamping**  
Reduces vehicle setup time

**Infinite-Positioning of Pull Collars**  
For the correct alignment of the pulls

**Working Heights (SL Series Only)**  
Eight working heights from 12" to 42"

**Specialty Frame Anchoring Options**  
For BMW, Mercedes, Honda & frame vehicles



**Power-Pro® SL**

Power-Pro 3000 SL  
3-Tower Configuration  
BH9014223

# Available Configurations

	Part Number	Number of Towers	Shipping Weight
Power-Pro 2000 SL	BH9014202	2	6,200 lbs.
Power-Pro 2000 SL	BH9014203	3	6,800 lbs.
Power-Pro 2000 SL	BH9014204	4	7,400 lbs.
Power-Pro 3000 SL	BH9014222	2	6,620 lbs.
Power-Pro 3000 SL	BH9014223	3	7,220 lbs.
Power-Pro 3000 SL	BH9014224	4	7,820 lbs.

	Part Number	Number of Towers	Shipping Weight
Power-Pro 2000 SLT	BHT9014202	2	5,200 lbs.
Power-Pro 2000 SLT	BHT9014203	3	5,800 lbs.
Power-Pro 2000 SLT	BHT9014204	4	6,400 lbs.
Power-Pro 3000 SLT	BHT9014222	2	5,620 lbs.
Power-Pro 3000 SLT	BHT9014223	3	6,220 lbs.
Power-Pro 3000 SLT	BHT9014224	4	6,820 lbs.