


geoliner[®] 600 & 650

IMAGING WHEEL
ALIGNMENT
SYSTEM

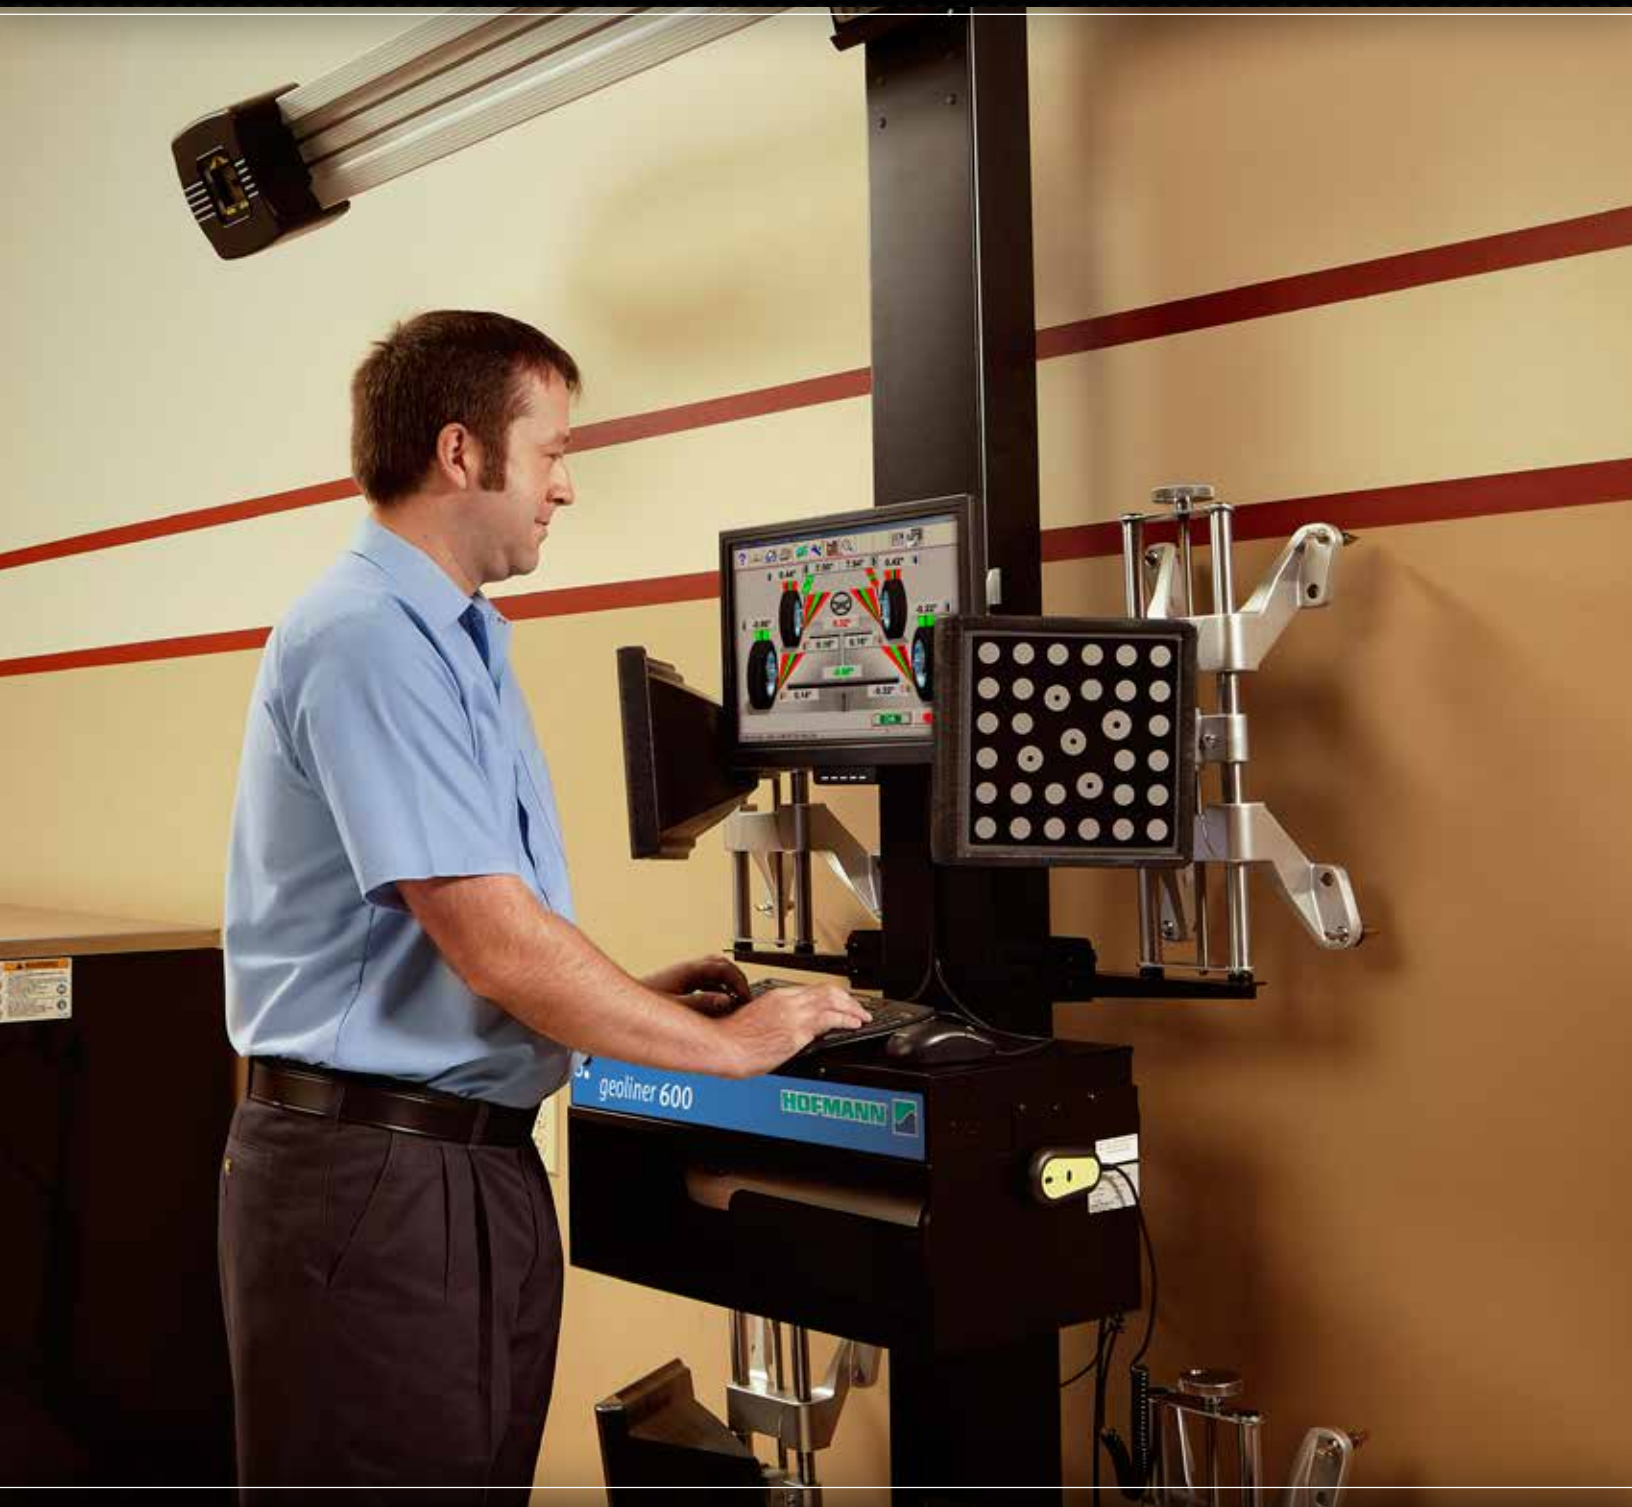

product features & specifications

Features

- **Versatile, Accurate Hardware** - digital cameras produce accurate, live alignment readings and diagnostic data. Passive front and rear targets improve durability with no electronics to damage
- **VODI™ (Vehicle Orientation Directional Indicator)*** - guides the technician through the measuring process. Reduces the amount of time spent walking back and forth from the vehicle to the aligner
- Optional fixed, variable-height† and tilt camera support
- EZ-LINK™ Steering Angle Sensor (SAS) reset information
- Comprehensive alignment specification database
- Two or four wheel alignment capability
- Patented EZ-TOE
- Live readings
- Help videos



Hofmann geoliner 600
EEWA721AL



Hofmann geoliner 650
EEWA712AL

SPECIFICATIONS

Equipment Specifications

- Wheel size: 13" - 24"
- Tire diameter: Unlimited
- Track width: 48" - 96"
- Wheel base: 79" - 180"
- Power requirements:
120/230V 1Ph 50/60Hz

Standard Accessories

- AC200 wheel clamps and targets
- Steering wheel holder
- Brake pedal depressor
- Color inkjet printer

Optional Accessories

- AC200 wheel clamp extension kit: EAK0268J62A
- Alloy quick clamp kit: EAK0268J63A
- Wheel clamp floor stand: EAK0289J71A
- Fixed-height camera support: EAA0321J01A
- Variable-height camera support: EAA0321J19C†
- Electronic tilt camera support kit: EAK0289J79A



* Patented and/or Patent-Pending Features
†EEWA712AL Only

Hofmann is committed to product innovation and improvement. Therefore, specifications listed in this brochure may change without notice. ©2015 Snap-on Incorporated. Hofmann is a trademark of Snap-on Equipment GmbH. All right reserved. All other marks are marks of their respective holders.

06/15 SS2602K

Hofmann USA
309 Exchange Avenue
Conway, AR 72032
800.251.4500
Int: 501.505.2662
www.hofmann-usa.com

Hofmann Canada
6500 Millcreek Dr
Mississauga ON L5N 2W6
800.362.4608
www.hofmann.ca

HOFMANN®

