
# MOBILE COLUMN LIFT

Heavy-duty Lifting in a Space-Saving Design



**JohnBean** 

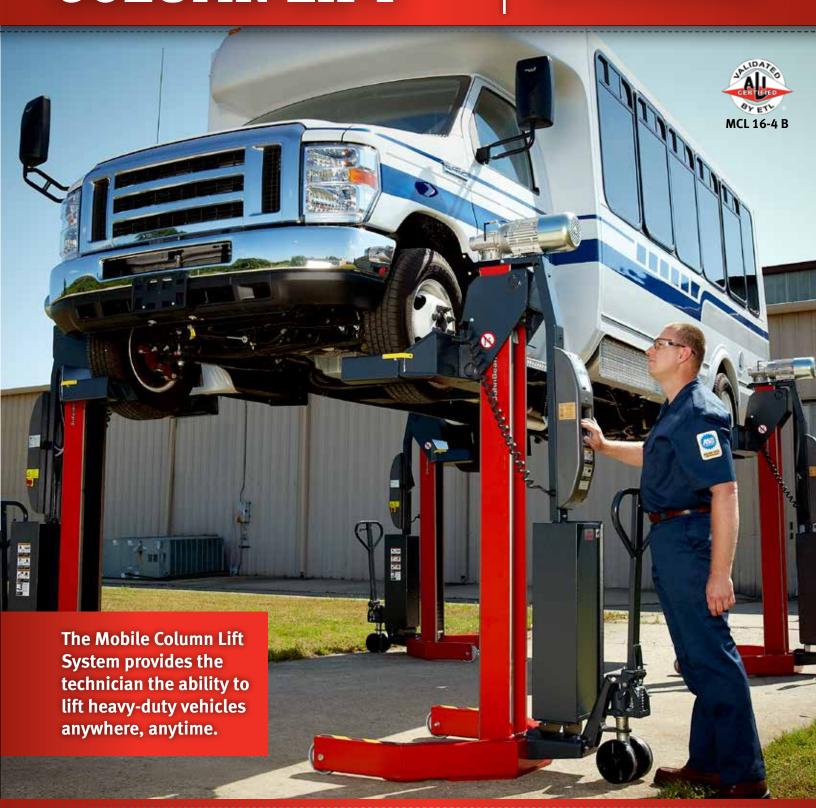


### **RE-CIRCULATING BALL SCREW**

- Operates at a constant speed when lifting and lowering
- Maintains natural unison between columns
- Operates with over 90% efficiency
- Minimizes power requirements
- Environmentally friendly
- Overall column height remains constant throughout travel range

### **UNPARALLELED SAFETY**

- Meets the highest standard for automotive lifts, ANSI/ ALI ALCTV current edition
- Mechanical safety auto engaging, independent of the lifting mechanism, engages directly with the column, prevents lowering during unlikely event of a system failure





The heavy-duty Mobile Column Lift system from John Bean has been designed to be easy to operate and able to perform under the extreme demands required by today's heavy-duty vehicles making it the ideal lift system for transport fleets, schools, government and military applications. Mobile Column Lifts are available in both wired and wireless configurations offering optimal support for any environment.



## **FEATURES**

- Electronic self diagnostics
- Standard leveling control
- Re-circulating ball screw
- Automatic synchronization
- High safety, independent, single point locking mechanism
- Lifting carriage with fixed wheel
  lifting forks
- Virtually maintenance free
- Space-saving column design
- New low weight design for easy handling
- Quick connect interlink cables for standard systems
- Battery systems include power supply for charging
- Processor controlled synchronizing
- Load holding in each column

# PRODUCT FEATURES & SPECIFICATIONS

#### **SPECIFICATIONS**

	MCL Standard JBC4066MC / JBC6099MC	MCL Standard MCL 18-4 / MCL 18-6	MCL Wireless Battery MCL 16-4 S-WRL / MCL 16-6 S-WRL	MCL Wireless Battery MCL 18-4 S-WRL / MCL 18-6 S-WRL
Lifting capacity			_	
per column	16,000 lbs	18,000 lbs	16,000 lbs	18,000 lbs
Number of columns	4 / 6	4 / 6	4 / 6	4 / 6
System capacity	64,000 / 96,000	72,000 / 108,000	64,000 / 96,000	72,000 /108,000
Lifting speed	113 sec	113 sec	165 raise / 117 lower sec	165 raise / 117 lower sec
Column height	98"	98"	98"	98"
Column width	43.3"	43.3"	43.3"	43.3"
Column depth	45.3"	45.3"	54.5"	54.5"
Lowered wheel fork height	6"	6"	6"	6"
Height of lifting fork	69"	69"	69"	69"
Width of lifting fork	23.5"	23.5"	23.5"	23.5"
Length of fork	12.2"	12.2"	12.2"	12.2"
Motor	2.4 hp	2.4 hp	2.0 hp	2.0 hp
Power requirements	208-230V / 440-480V	208-230V / 440-480V	120VAC for Recharge	120VAC for Recharge
	3Ph 60Hz	3Ph 60Hz	3Ph 60Hz	3Ph 60Hz
Shipping weight per column	950 lbs	1000 lbs	1200 lbs	1230 lbs

## **STANDARD ACCESSORIES**

- Mobile support stand 16,000 and 18,000 lbs capacity
- Fork reduction sleeves one pair per column
- Light vehicle adapter
- Cart for light vehicle adapter
- Extension kit for light vehicle adapter
- Cross beam (32,000 lbs capacity)

## **OPTIONAL ACCESSORIES**

- Additional main control box\*
- Additional dummy plug for paired column operation\*

# **ADDITIONAL MODELS ARE AVAILABLE**

Please speak with your John Bean representative for more details.

\* Optional accessory for Standard Systems only

John Bean is committed to product innovation and improvement. Therefore, specifications listed in this brochure may change without notice. © 2012 Snap-on Incorporated. John Bean is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders.

07/12 SS3081A

**Snap-on Equipment** 309 Exchange Avenue Conway, AR 72032 800.362.4618 Int: 501.505.2739 www.johnbean.com

John Bean Canada 6500 Mill Creek Dr Mississauga ON L5N 2W6 800.362.4608 Fax: 905.826.7800 www.johnbean.ca

