

TIRE CHANGING SYSTEMS




COMBINE SPEED, VERSATILITY AND SAFETY
INCREASED PRODUCTIVITY.

High productivity and easy to use.

INTRODUCING THE **EHP SERIES** TILT-ARM TIRE
CHANGERS

JohnBean™

THE EHP SERIES TILT-ARM TIRE CHANGING MACHINE MAXIMUM ERGONOMIC

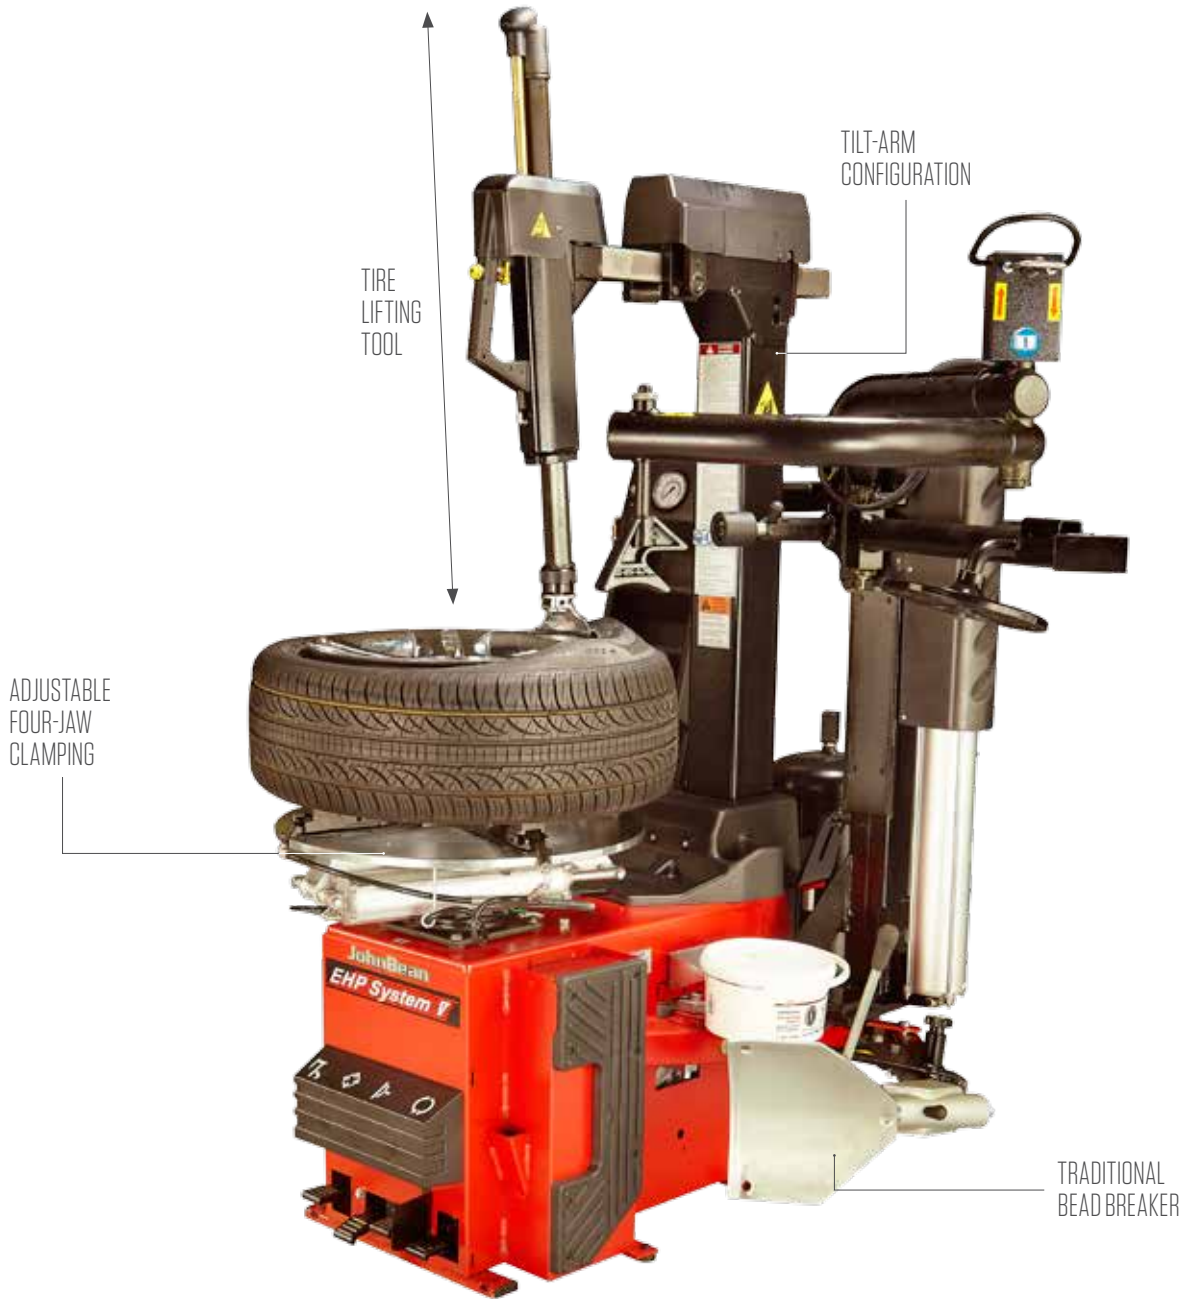

HANGING SYSTEMS. CLEARANCE.



Tilt-arm Configuration



Adjustable Four-Jaw Clamp



Integrated Bead Breaker



Tire Lifting Tool



Pneumatic Bead Assist

EHP SERIES TILT-ARM TIRE CHANGING SYSTEM

John Bean® EHP series tire changing systems are ideal for handling passenger car, light truck and high-performance wheel/tire assemblies. Ergonomic design and safety enhancing features provide the technician a safe work space when changing a variety of tires. Locking of the mount/demount head offset, which provides maximum cosmetic safety for expensive wheels and significantly reduces the risk of harming wheel/tire assemblies. Both EHP tilt-tower models are available with two speed capabilities.

KEY FEATURES

TILT-ARM CONFIGURATION

- Pneumatically locks vertically and horizontally
- Rigid design significantly reduces the possibility of harm to the rim or tire bead on low-profile and run flat wheels
- Maximum ergonomic clearance for installing the tire on the turntable

ERGONOMICALLY POSITIONED BEAD BREAKER CONTROL

- Pedal is positioned away from the bead breaker with a guard, preventing the operator from accidentally stepping on and activating it while standing next to the bead breaker

INTEGRATED PRESSURE LIMITER

- Stops air flow once pressure has reached 55 PSI (3.5 Bar) preventing accidental tire over-inflation

ADJUSTABLE FOUR-JAW CLAMP

- Self-centering nylon-covered clamps grip securely and protect the wheel

TWIN-CYLINDER CLAMPING

- Two powerful clamping cylinders provide uniform clamping pressure and increased power

EXTRA WHEEL PROTECTION

- Replaceable nylon inserts for demount heads prevent wheel scratching

OPTIONAL TWO-SPEED CAPABILITY

- Two-speed models offer the advantage of 14 RPM allows the technician faster throughput through the bay

OPTIONAL ACCESSORIES

PATENTED SAFETY RESTRAINT ARM (SRA)

- Positively restrains wheel and tire assembly to the tire changer during the inflation process
- Reduces potential for injury by the unlikely event of wheel or tire failure
- Simple swing-arm design easily swings in from the left
- Allows the technician to quickly and safely perform tire inflation without disturbing the tire changing procedure
- Positioning safety interlock switch ensures that the SRA is centered on the wheel and tire assembly before the inflation process can begin
- Anti-rotation lock prevents the SRA from moving during the inflation process in the event of an accidental explosion
- Gravity lock engages automatically without operator intervention and ensures the wheel is secured prior to inflation

PNEUMATIC BEAD ASSIST

- The optional pneumatic bead assist features a three piece design with a top roller, pressing foot and lifting disc. Each piece provides a specialized function that assists a single operator in mounting/demounting low-profile and high-performance tires
- Assists operator with bead lubrication, wheel clamping, lower bead lifting, re-loosens beads and allows one operator mounting of the stiff upper bead
- Standard with all EHP System V models

EQUIPMENT SPECIFICATIONS*

- Part Number:
- Two-Speed Part Number:
- Outer-Clamping Diameter Range:
- Inner-Clamping Diameter Range:
- Maximum Wheel Width:
- Maximum Tire Diameter:
- Compressed Air Supply:
- Adjustable Four Claw Wheel Clamp:
- Integrated Bead-Seating Jets:
- Pressure Timer:
- Twin Cylinder Turntable Clamping:
- Bead Breaker Power:
- Bead Breaker Range:
- Recommended Floor Space:
- Shipping Weight:
- Power Requirements:
- Two-Speed Power Requirements:
- Optional Pneumatic Bead Assist Part Number:

EHP SYSTEM V

EEWH517B
 EEWH554A
 12" - 26"
 14" - 26"
 16"
 47"
 110 - 170 PSI
 Included
 Included
 Included
 Included
 3,400 lbs @ 170 PSI
 Position One: 2.5" - 12"
 Position Two: 6" - 16.5"
 72" (W) x 78" (D)
 1,000 lbs
 120V 1Ph 60Hz
 208-230V 1Ph 16A 60Hz
 Standard

EHP SYSTEM IV-E

EEWH514BE
 EEWH553AE
 10" - 24"
 12" - 24"
 15"
 40"
 110 - 170 PSI
 Included
 Included
 Included
 Included
 3,400 lbs @ 170 PSI
 Single 3" - 16"
 72" (W) x 78" (D)
 960 lbs
 120V 1Ph 60Hz
 208-230V 1Ph 16A 60Hz
 EAA0329G34B

*Specifications based on OEM tires.

For more information regarding the **EHP Series** call **800.362.4618 (US)** or **800.362.4608 (Canada)**
www.johnbean.com / www.johnbean.ca

JohnBean™

John Bean is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2015 Snap-on Incorporated. John Bean is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders.