

WHEEL BALANCING SYSTEMS



COMBINES HIGH QUALITY WHEEL BALANCING & NO TOUCH DIAGNOSTICS.

Laser based 3D profiling provides automatic diagnostic analysis.

INTRODUCING THE **B2000P** DIAGNOSTIC WHEEL
BALANCING SYSTEM

JohnBean[™]

THE B2000P DIAGNOSTIC WHEEL PATENTED VIRTUAL PLANE IMAGING



OPTI-LINE™

- Improves ride performance and pull problems that cannot be fixed by wheel alignment alone
- Eliminates multiple tire rotations to reposition tires and reduces time required for road tests
- Handles any kind of wheel, including wheels with directional tires
- Address pull or vibration related issues by suggesting the optimal location for each wheel in the set based on tire conicity or radial runout



BALANCING SYSTEM. AGING TECHNOLOGY.

ERROR PROOF RESULTS AND STATE-OF-THE-ART ANALYSIS PROVIDE CUSTOMER SATISFACTION

The B2000P is the only automated diagnostic wheel balancing system that offers touchless measurement and analysis. Automatic inputs remove the chance for error and inaccurate results. When combined with precise wheel balancing, the Runout Force Vectoring (RFV) diagnostics assure uniformity based total ride quality.

KEY FEATURES

RUNOUT MEASUREMENT

- Hundreds of thousands of measurement points are taken with a resolution of 0.004" (0.1mm) to create a 3D model of the tire and wheel assembly

LASER BASED RUNOUT

- Quickly and easily provides advanced geometry related measurements, using technology that surpasses the performance of mechanical roller-based systems

AUTOMATIC 3D TIRE LASER MAPPING SYSTEM

- High resolution camera and laser based topography mapping emulates the same technology used by tire manufacturers in industrial applications. Tire tread and sidewall color analysis allows depth, wear and abnormalities to be displayed in a simple to interpret format

AUTOMATIC INPUTS

- Optical scanners automatically measure the wheel. The scanners recognize the wheel type/edge. Correct weight type and size shown to aid productivity

AUTOMATIC BALANCE MEASUREMENTS

- The color display shows the location of any imbalance and identifies the optimal tape or clip-on weight location
- Automatically measures assembly and rim runout and calculates runout force vectoring for a quick fix match-mounting solution

AUTOMATIC BEHIND THE SPOKE WEIGHT PLACEMENT

- A laser indicates the exact weight location behind the spoke

PATENTED AUTOMATIC POWER CLAMP


- The electromechanical power clamp device always clamps the wheel accurately with a constant force
- Provides a reliable and consistent condition to assure accurate and repeatable measurements




Touchscreen User Interface




Automatic Balance Measurement

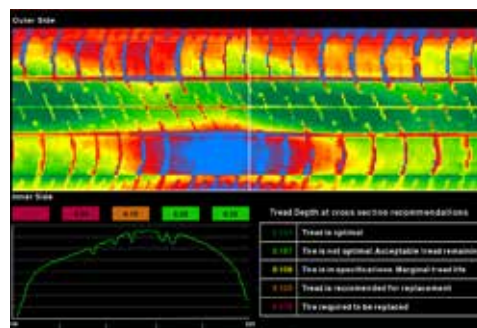

Runout Measurement

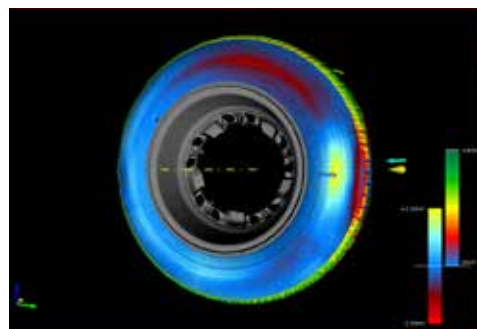

Automatic 3D Tire Laser Mapping System

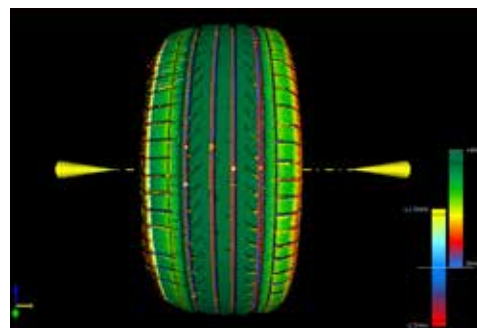

Automatic 3D Tire Laser Mapping System

OPTIONAL ACCESSORIES

ACURA® / HONDA® TOOLING KIT (EAK0221J94B)

AUDI® / VOLKSWAGEN® TOOLING KIT (EAK0221J95C)

BMW® / MINI® TOOLING KIT (EAK0221J96B)

CHRYSLER® / DODGE® / JEEP® TOOLING KIT (EAK0221J83A)

FORD® / LINCOLN® / MERCURY® TOOLING KIT (EAK0221J97C)

GENERAL MOTORS® TOOLING KIT (EAK0221J74B)

INFINITI® / NISSAN® TOOLING KIT (EAK0221J98A)

JAGUAR® / LAND ROVER® TOOLING KIT (EAK0221J99C)

LEXUS® / TOYOTA® / SCION® TOOLING KIT (EAK0309J01D)

MAYBACH® / MERCEDES-BENZ® TOOLING KIT (EAK0309J02C)

SUBARU® TOOLING KIT (EAK0309K03B)

JOHN BEAN® GLOVES (JBGLOVE500)

- Available in Adult XXL, XL, L, M and S sizes

ADDITIONAL ACCESSORIES

- John Bean offers a wide variety of precision tooling kits. See our wheel balancing system catalog by visiting www.johnbean.com



Automatic Balance Measurements



Automatic 3D Tire Laser Mapping System

EQUIPMENT SPECIFICATIONS

- Part Number: EEWB582AP230
- Max Wheel & Tire Assembly Weight: 154 lbs (69.9kg)
- Max Wheel & Tire Assembly Diameter: 44" (112cm)
- Max Wheel & Tire Assembly Width: 20" (50.8cm)
- Shaft Diameter: 40mm
- Shaft Length: 8.86" (22.5cm)
- Measuring Speed: 200 RPM
- Balancing Accuracy: 1g / 0.7°
- Wheel Diameter Range: 8" - 30" (20.32cm - 76.2cm)
- Dimensions (DxWxH): 51.7"x34.2"x72.2" (131x86.87x183.4cm)
- Shipping Weight: 418lbs (190kg)
- Power Requirements: 230V 1Ph 50/60Hz

For more information regarding the **B2000P**
call **800.362.4618 (US)** or **800.362.4608 (Canada)**
www.johnbean.com / www.johnbean.ca

John Bean is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2015 Snap-on Incorporated. John Bean is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders.

10/15 SS153529

JohnBean™