# PRODUCT FEATURES & SPECIFICATIONS

#### **STANDARD**

#### **Rear Slip Plates**

- Maintenance reduced
- **Encapsulated bearings**
- Flush mount



### **Roll-Formed Steel Columns\***

**Dramatically improves** column strength



### **Premium Turnplates\*\***

- Part #EAK0289J06A
- EELR509A includes lights and locks on the front turnplates



\*Front columns only \*\* Optional on EELR507A

## **LOW-PROFILE ROLLER JACKS**

Interchangeable fast fit adapters for brake, tire and alignment services; air over hydraulic controls requiring only 90-120 PSI air pressure; high lifting height; no requirement to swing away for storage

#### **ROLLER JACK SPECIFICATIONS**

- Capacity
- Minimum Arm Reach
- Maximum Arm Reach
- **Raised Height**
- **Lowered Height**
- **Shipping Weight**

7,000 lbs (3175 kg)

31" (787 mm)

52 <sup>5</sup>/8" (1337 mm)


13 <sup>1</sup>/<sub>8</sub>" (333 mm)

2 3/8" (60 mm)

329 lbs (149 kg)



EELR510A

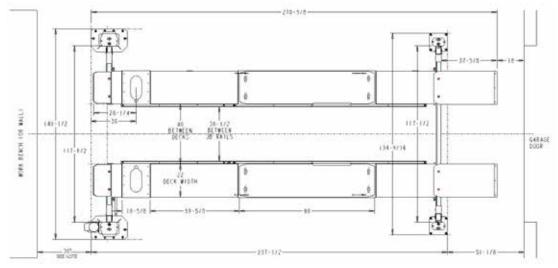

Contact John Bean Technical Support for additional information on product bay layouts

## **SPECIFICATIONS**

## **Equipment Specifications**

- Capacity: 14,000 lbs
- Front Accessibility: Open
- **Roller Jack Model:** EELR510A
- Min Max 4 Wheel **Alignment Wheel Base:** 70" - 158"
- Max 2 Wheel Alignment Wheel Base: 188"
- **General Service Wheel** Base: 205"
- Runway Width: 22"
- **Distance Between** Runways: 40"
- Overall Width: 140.5"
- Overall Length: 270 5/8"
- Lifting Height: 74"
- Lowered Height: 7"
- **Lifting Time: 70 sec**
- **Shipping Weight:** 4,850 lbs
- Roller Jack Air Requirements: 90-120 PSI
- **Power Requirements:** 230V 1Ph 60Hz

John Bean is committed to product innovation and John Bean is committed to product innovation and improvement. Therefore, specifications listed in this brochure may change without notice. © 2014 Snapon Incorporated, John Bean is a trademark, registered in the United States and other countries, of Snapon Incorporated. All rights reserved. All other marks are marks of their respective holders.

For more information regarding 14k Four-Post Lifts Call 800.362.4618 (US) or 800.362.4608 (Canada)

